
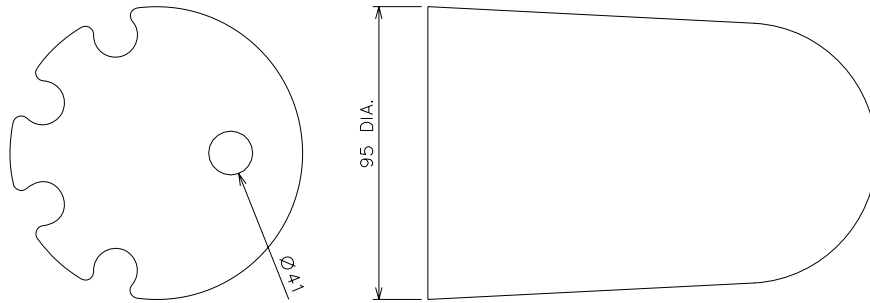


NOTE :  
NOT FOR MANUFACTURING PURPOSES

SAP MATERIAL No.:		0168958						
SHORT DESCRIPTION:		CABLE END 4-25mm SQ D3148						
TECH. DESCRIPTION:								
CABLE END * POLYMERIC * UV STABILIZED WITH BANDIT STRAP OR UV STABILIZED CABLE TIE IN ACCORDANCE WITH NRS 020 TO TIGHTEN (MINIMUM CABLE TIE DIMENSIONS : 4mm WIDE x 1.3mm THICK x 200mm LG) * SUITABLE FOR : 2 CORE 4 - 25mm SQ, 3 CORE 16-25mm SQ. AND 4 CORE 16-25mm SQ. PVC INSULATED / SHEATHED STEEL WIRE ARMoured CABLE * ESKOM DRAWING No. D-DT- *								
ITEM		:- CABLE END						
MATERIAL SPECIFICATION		:- POLYMERIC						
CORROSION SPECIFICATION		:-						
STANDARD SPECIFICATION		:-						
ESKOM SPECIFICATION		:- D-DT-3148						
TEST & CERTIFICATION REQUIREMENTS :-								
INSPECTION		Yes	No	ESKOM RELEASE NOTE		Yes	No	
IDENTIFICATION:- INDELIBLE MANUFACTURES TRADEMARK & PART No. ON ALL ITEMS								
5	SPELLING OF POLYMERIC INCORRECT			P.A.V.	R.KELLY	R.KELLY	18.09.07	
4	UV STABILIZED ADDED FOR CABLE TIE			P.A.V.	R.KELLY	R.KELLY	07.07.05	
3	CABLE TIE OPTION ADDED			P.A.V.	R.KELLY	R.KELLY	11.04.05	
REV	REVISION DESCRIPTION			BY	CHKD	AUTH	DATE	
AUTH:		P. CROWDY	DATE:	16.03.1998			SAP No:	
CHKD:		D. PILLAY	DATE:	16.03.1998			0168958	
DRAWN:		P.A. VERMAAK	DATE:	20.01.1998	<b>D-DT-3148</b>		SET	SHEET
							2	1
							REV	5



NOTE :  
NOT FOR MANUFACTURING PURPOSES

SAP MATERIAL No.:		0168956					
SHORT DESCRIPTION:		CABLE END 35-70mm SQ D3148					
TECH. DESCRIPTION:							
CABLE END * POLYMERIC *							
UV STABILIZED WITH BANDIT STRAP OR UV STABILIZED CABLE TIE							
IN ACCORDANCE WITH NRS 020 TO TIGHTEN							
(MINIMUM CABLE TIE DIMENSIONS : 8mm WIDE x 2mm THICK x 270mm LG) *							
SUITABLE FOR :							
2 CORE 35 - 70mm SQ, 3 CORE 35-70mm SQ. AND 4 CORE 35-50mm SQ.							
PVC INSULATED / SHEATHED STEEL WIRE ARMoured CABLE *							
ESKOM DRAWING No. D-DT-3148 *							