
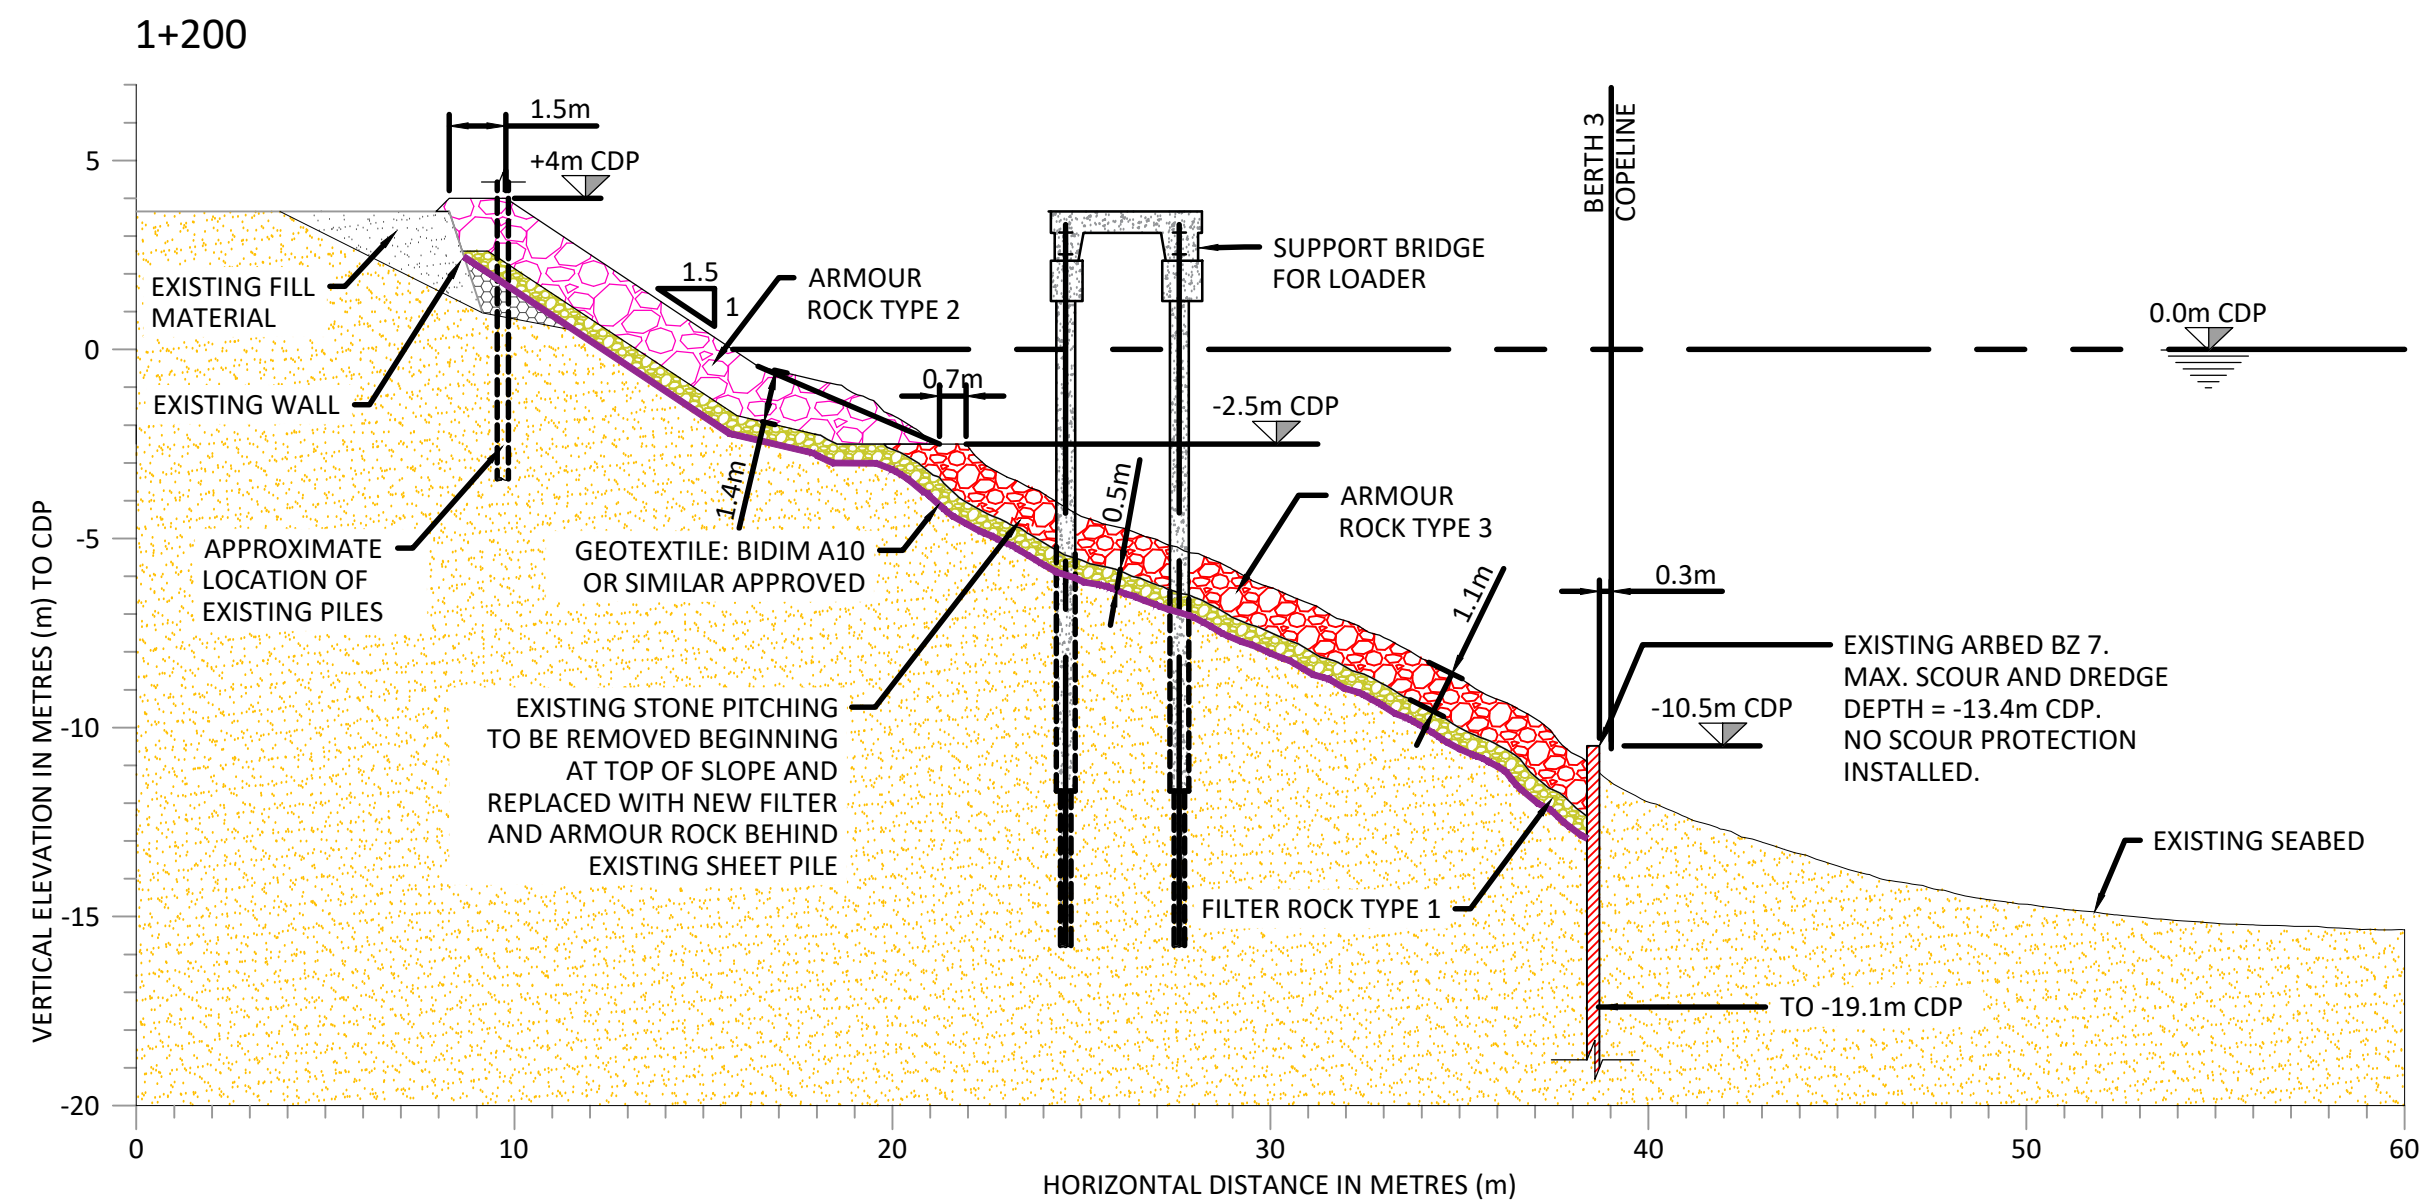


PLAN
SCALE: 1:250

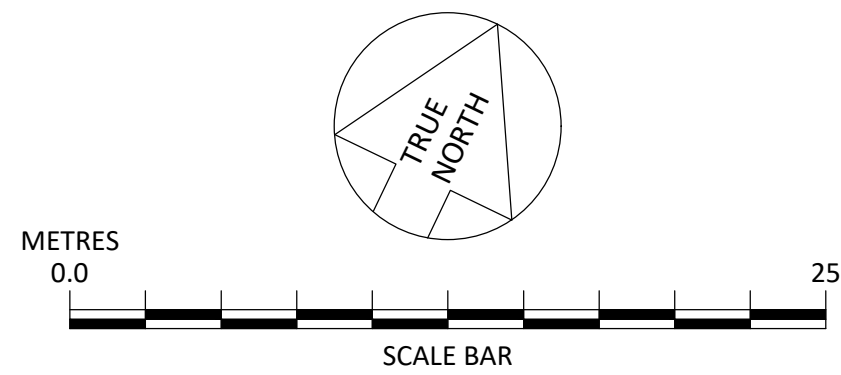

SECTION A
SCALE: 1:200

LEGEND			
	M50 [kg]	D50 [m]	SECTION
CREST	VARIES		
ARMOUR 1	1800-2500	0.9	
ARMOUR 2	500-1500	0.8	
ARMOUR 3	150-700	0.6	
ARMOUR 4	30-200	0.4	
EXISTING FILL MATERIAL	---	---	
ASSUMED EXISTING REVETMENT	---	---	
FILTER ROCK - TYPE 1	70	0.3	
FILTER ROCK - TYPE 2	5	0.12	
BLINDING OF EXISTING REVETMENT (FILTER ROCK TYPE 3)	0.5	0.053	
GEOTEXTILE LAYER	---	---	

NOTES

- DO NOT SCALE DRAWING - ONLY DIMENSIONS SHOWN TO BE USED.
- THE CONTRACTOR SHALL VERIFY ALL CONDITIONS, DIMENSIONS AND LEVELS ON THE SITE AND NOTIFY THE NEC SUPERVISOR OF ANY VARIATIONS BEFORE CONSTRUCTION.

CONTRACTOR / CONSULTANT				ORIGINATOR: PRDW			
TITLE	NAME	SIGN	DATE	TITLE	NAME	SIGNATURE	DATE
.	.	.	.	DRAWN	SE		26 10 22
.	.	.	.	CHECKED	ML		26 10 22
.	.	.	.	DESIGN	SE		18 02 22
.	.	.	.	CHECKED	ML		18 02 22
OPERATING DIVISIONS				PR.ENG. / PR.TECH.			
TITLE	NAME	SIGN	DATE	NAME	M. LETSIE		DATE
.	.	.	.	SIGNATURE		26 10 22	
.	.	.	.	REG. NUMBER	2001270051		
.	.	.	.	SCALE:	SCALE	ORAS NOTED	A1
REVISIONS / ISSUE AUTHORIZATION				This Document including all design and information therein is Confidential Intellectual Property of Transnet and/or PRDW. Copyright and all other rights are reserved by Transnet and/or PRDW. This Document may only be used for its intended purpose.			

Transnet NATIONAL PORT AUTHORITY

237 MAHATMA GANDHI ROAD
DURBAN
P.O. BOX 38163, DURBAN

TEL: 031 361 1696
FAX: 0866 770815

PORT OF DURBAN

ISLAND VIEW SEAWALLS

BERTH 3 TO BERTH 4

PROJECT NUMBER	OD	FBS	DIS	TYPE	DRAWING NO.	SHEET	REV	ID
1	0	0	0	C	LA-0008	01	0A	TD