


TYPICAL SECTION

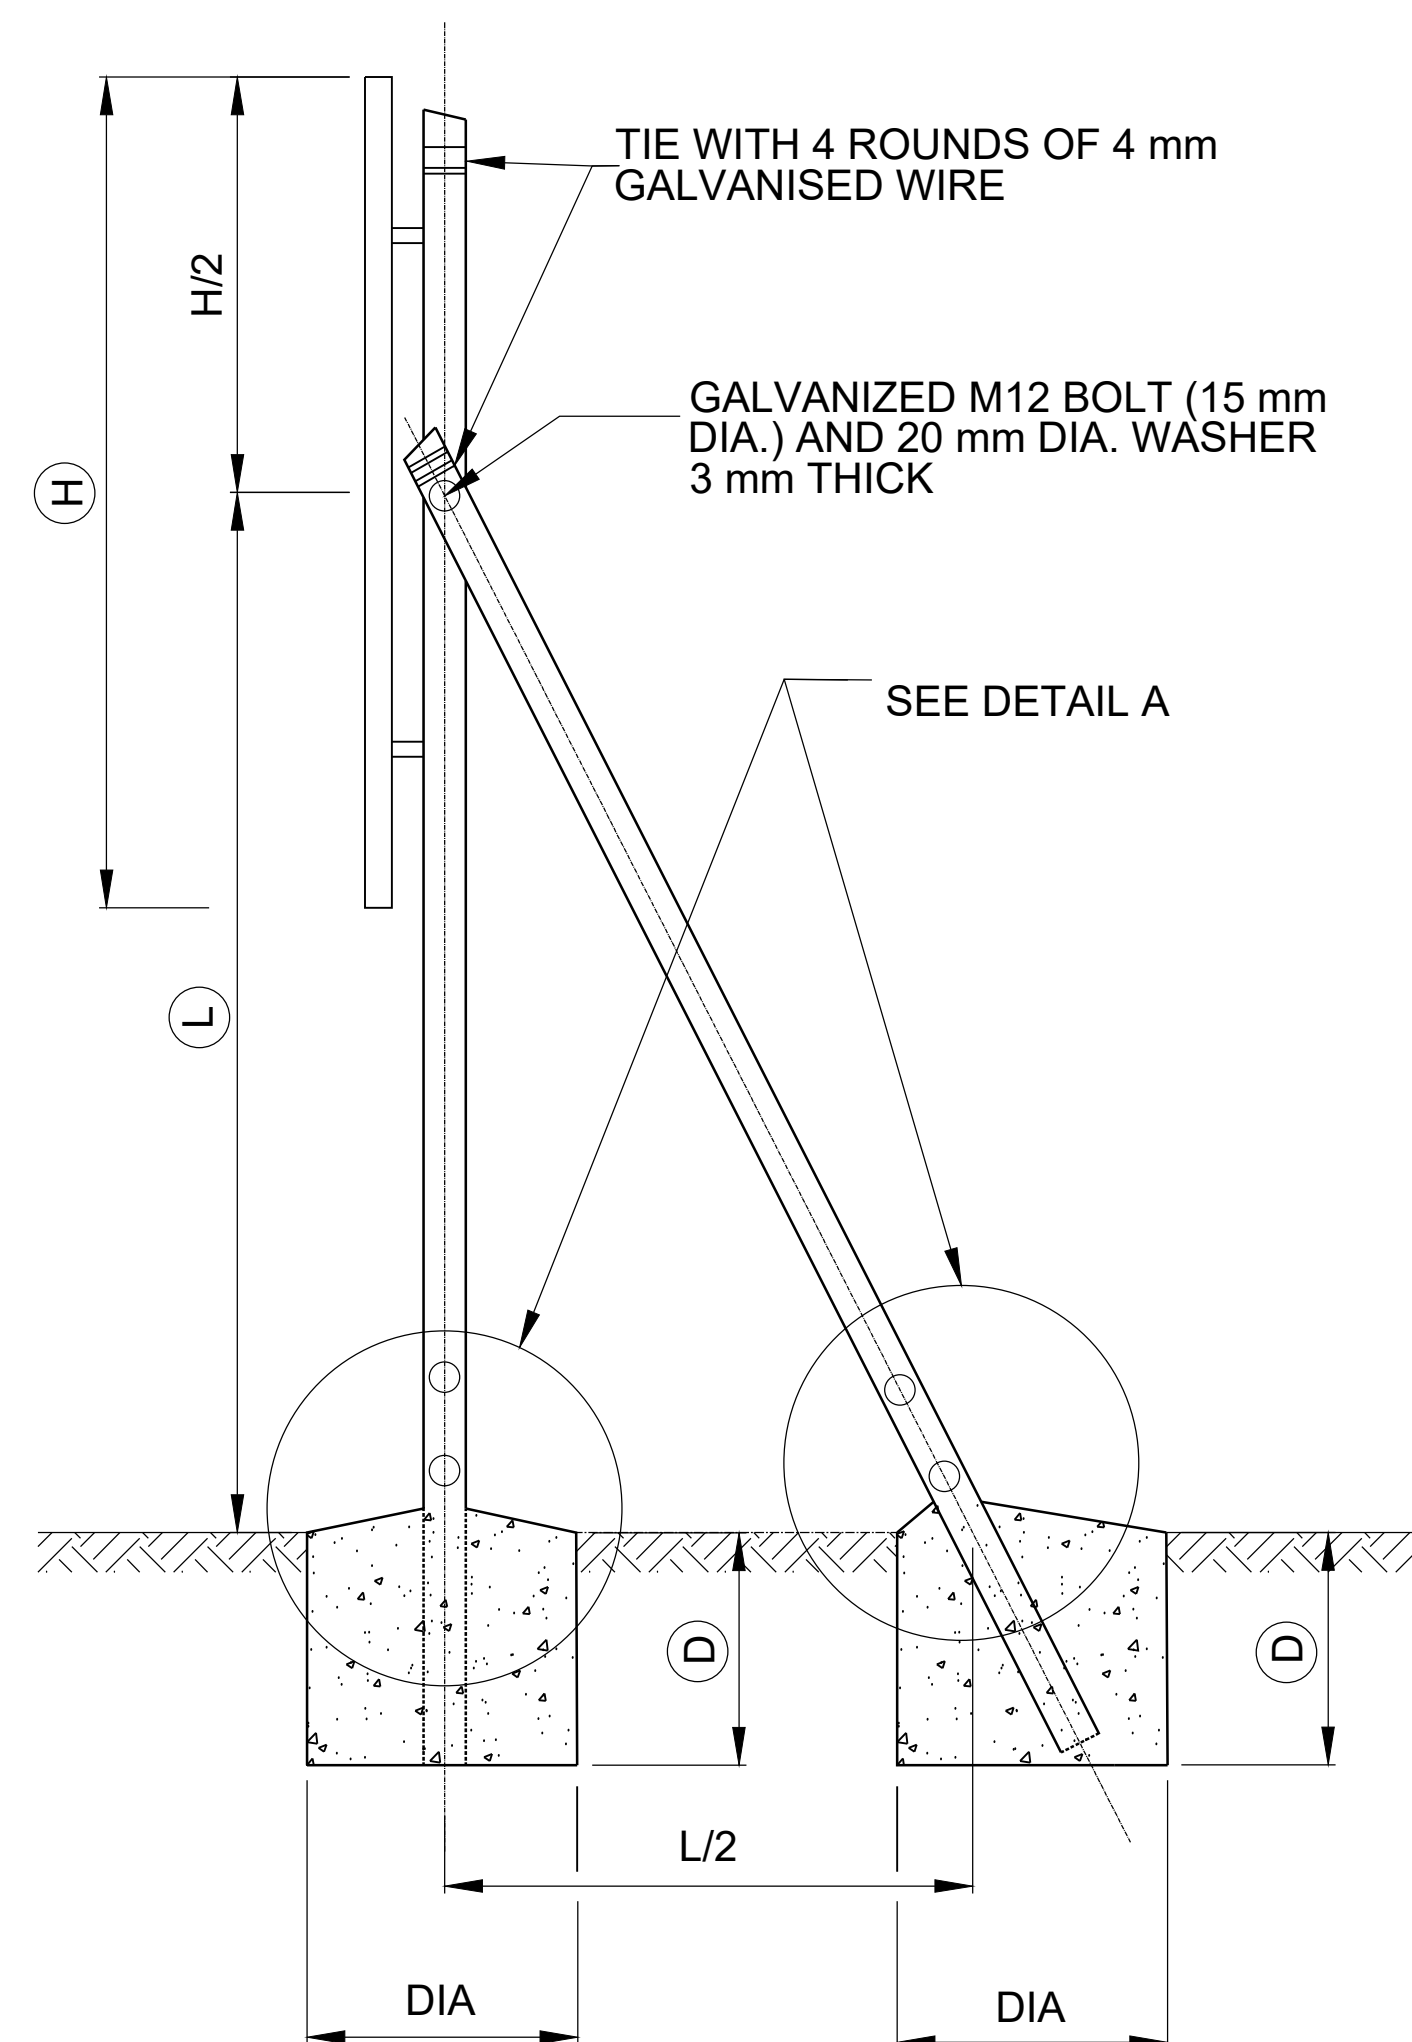

ROAD SIGN FACES SHALL BE MANUFACTURED STRICTLY IN ACCORDANCE WITH THE DETAILS SHOWN ON DRAWING TD-RS-100. TRANSPORTATION AND ERECTION OF SIGN FACES SHALL BE CARRIED OUT IN SUCH A WAY THAT DAMAGE TO THE SIGN IS PREVENTED. THE LOWER EDGE OF SIGN FACES SHALL BE HORIZONTAL AFTER COMPLETION OF ERECTION. THE MONTH AND YEAR OF ERECTION OF THE ROAD SIGN SHALL BE INDICATED BY MEANS OF WHITE PAINT ON THE BACK OF THE SIGN IN THE BOTTOM RIGHT HAND CORNER. THE LETTERS AND FIGURES SHALL BE 25 mm HIGH.

(FOR TENDER PURPOSES ONLY)

[illegible]