

A Division of Transnet SOC Limited

# ICTM (TRACK TECHNOLOGY) SPECIFICATION

### **Specification for Railway Earthworks**

S410

Author:	Track Technology		
Approved:	Senior Technologist Track Technology	J.K. Kae	Qu.
Authorised:	Senior Technologist Track Technology	J.K. Kae	Qr.
Date:			March 2020

Circulation Restricted To: Transnet Freight Rail Transnet and Relevant Third Parties Unrestricted

© This document as a whole is protected by copyright. The information herein is the sole property of Transnet SOC Ltd. It may not be used, disclosed or reproduced in part or in whole in any manner whatsoever, except with the written permission of and in a manner permitted by the proprietors.

1.	Document version
2.	Scope
3.	Related documentation3
4.	Definitions4
5.	Background4
6.	Order of work5
7.	Drainage5
8.	Table drains, catchwater drains and mounds    5
9.	Properties and classification of materials for placing purposes6
10.	Placing of materials10
11.	Compaction11
12.	Stabilisation11
13.	Test Materials12
14.	Off-tracking platforms13
15.	Stream Diversions Inlets and outlets of bridges and culverts14
16.	Haul Roads14
17.	Haulage14
18.	Service Roads14
19.	Tolerances
20.	Measurement and Payment16

#### 1. <u>Document version</u>

Amendment number	Section amended	Summary of amendments	Date issued
0		Original document	2004/05/01
1	6	Second revision – Figure 2, structural layers for 30t axle loading.	2006/03/01
2	3, 19, 20	Referring to SANS specification instead of SABS in the document.	2016/10/01
3	9.5, 9.7	Activity included in selection of material.	2016/10/01
3	9.91	Significance of initial consumption of line (ICL) and lime demand included in the design requirement.	2016/10/01
3	13.4.2	Test Material.	2016/10/01
3	18.8	Wearing course requirement.	2016/10/01
4	3	Terminology is referred in terms of SANS 3001 standards and not TMH1 as previously.	2020/03/12
4	4.3	TMH1 test method to SANS 3001-GR30.	2020/03/12
4	4.10	Clarification on the definition of an Engineer	2020/03/12
4	9.4	Sieve size 13.2mm changed to 14mm.	2020/03/12
4	9.9.2.2	TMH1 Method A19 changed to SANS 3001-GR55.         2020/03/12	
4	9.10.1	TMH1 Method B2 changed to SANS 3001-AG10.2020/03/12	

#### 2. <u>Scope</u>

This specification covers railway earthworks and service roads as well as other earthworks that may be specified in the project specification. These technical requirements must be used by existing and new suppliers as a guide for their proposal and include the minimum requirements.

This document supersedes all previous Railway earthworks specifications.

#### 3. <u>Related documentation</u>

The following documents are to be used in conjunction with this specification:

- Specification SANS 1200C, SANS 1200D and SANS 1200DN shall apply in addition to this specification unless in conflict herewith.
- All tests and terminology referred to herein are in terms of SANS 3001 standards.

#### 4. <u>Definitions</u>

- 4.1. Catchwater Drain: an open drain to intercept water and to lead it to suitable discharge points.
- 4.2. Catchwater Mound: a mound formed to intercept stormwater.
- 4.3. *Modified AASHTO Density:* the maximum dry density obtained when testing a sample of soil or granular material in accordance with SANS 3001-GR30.
- 4.4. *Non-Cohensive Soil:* a non-plastic material with not less than 93% passing a 4,75mm sieve and not more than 10% passing a 0,075mm sieve.
- 4.5. *Pedogenic Material:* a soil, which has become strongly, cemented e.g. ferricrete, calcrete and silcrete.
- 4.6. *Right-Of-Way:* the strip of land reserved by statute for a railway.
- 4.7. Service Road: a road alongside the railway line for maintenance purposes.
- 4.8. *Table Drain:* a shallow drain on the side of the formation to carry surface water.
- 4.9. *Activity*: the degree of the clay size fraction of the soil expressed as the ratio of the plasticity index of the whole sample to the percentage of clay size particles of the whole sample in the soil.
- 4.10. *Engineer*. Professionally registered person under either category of registration; Professional Engineer, Professional Engineering Technologist and Professional Engineering Technician and also having education, training and experience within sub-discipline geotechnical engineering and or pavement engineering according to the rules of conduct for registered persons, under Act No. 46 of 2000.

#### 5. <u>Background</u>

Earthworks material of good quality, engineering properties including strength and long term durability has been used by Transnet during rehabilitation and design of newly built track sections for safe passage of trains and reduction in maintenance. The engineering selection of the railway formation material according to Railway Earthworks classification has been developed based on theoretical and empirical evaluation and analysis over the years. With the aim of the formation and the subgrade to optimally performs its function of safe superstructure bearing capacity support under all harsh conditions including resilient loading, resistance to ingress of moisture, chemical weathering due to increasing axle loading and should be readily available or sourced from natural material resource.

#### 6. <u>Order of work</u>

6.1. The Contractor shall carry out the work in the order specified, or as directed by the Engineer.

#### 7. <u>Drainage</u>

7.1. The prevailing drainage pattern and flow of water shall be maintained but, if temporarily altered, the original conditions shall be restored.

#### 8. <u>Table drains, catchwater drains and mounds</u>

- 8.1. Table drains shall be constructed true to line and level along the length of all cuttings on both sides of the formation and elsewhere if ordered, to dimensions specified.
- 8.2. Catchwater drains shall be constructed to dimensions and levels as specified. Material excavated shall be deposited on the low side of the drain to form a catch-water mound.
- 8.3. Where the crossfall at right angles to the track does not generally exceed 1 in 6, and unless otherwise directed by the Engineer, a catch-water drain and mound shall be formed by cutting at a slope of 1 in 3 against the natural slope as indicated in Figure 1.

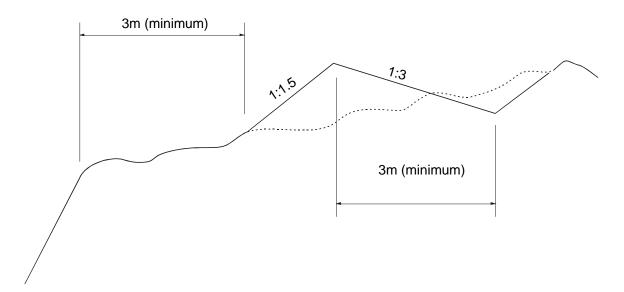



Figure 1: Catchwater drain geometry

- 8.4. Where the ground conditions are such that the economic excavation of a drain is not possible, a catchwater mound 3m at a slope of 1 in 3 on the waterside shall be constructed of top soil or other selected material.
- 8.5. Catchwater mounds and drains shall be not closer that 3m from the top edges of cuttings or toes of fills and shall be completed as soon as possible to encourage the growth of vegetation transported with the material.

#### 9. <u>Properties and classification of materials for placing purposes</u>

- 9.1. Material that consists of soil with rock not larger than two-thirds of the loose layer thickness is classified as soil. All other material is classified as rock.
- 9.2. Rock shall not be used within 900mm of the formation except with the permission of the Engineer.
- 9.3. The properties of the soil in the bulk earthworks and in the structural layers indicated in Figure 2 shall, subject to the requirements of 9.5 to 9.9, be as shown in Table 1.

9.4. Stabilisation of the sub-ballast Layers shall be performed only when suitable natural soils is not available and when directed by the Engineer.

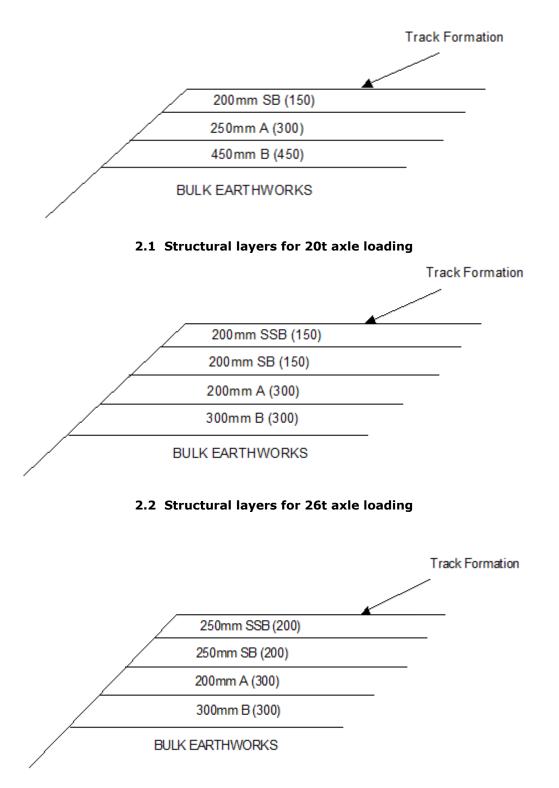

2.3 Structural layers for 30t axle loading

Notes: 1. Dimensions in brackets apply when layers SB and SSB are stabilised.

2. Table 1 gives material properties, compaction and strength required.

#### Figure 2: Structural layers between bulk earthworks and formation

		MATERIAL PROPERTIES							Minimum	Minimum		
LAYER	SAR	Min.	% BY MASS PASSING SIEVE (sieve size in mm)					Max.	compaction % of modified	after		
		Index	Grading Modulus	75	14.0	2.0	0.425	0.075	PI	CBR Swell %	AASHTO Density	compaction CBR
YERS	SSB	<50	2.0	100	60-85	20-50	10-30	5-15	3-10	0.5	98	60 <b>(o)</b> (1.5-3 MPa)
SUB LAYERS	SB	<80	1.8	100	70-100	20-60	10-40	5-20	3-10	0.5	95	+ 30 <b>(o)</b> (1.5-3 MPa)
	A	<110	1.0					<40	<12		95 100*	20
	В	<155	0.5					<70	<17		93 98*	10
e	Bulk arth orks								<25	2	90 95*	5

#### Table 1: Material properties for earthworks construction

\* These densities apply to non-cohesive soils

(o) Strengths in brackets apply in place of CBR values where sub-ballast is stabilised

+ Increase to 45 in the absence of Layer SSB unless otherwise specified (Increase not normally required in dry areas.)

**Note**:- See Appendix A for comparable road materials. The classifications shown may be used by the Contractor at his discretion when preparing preliminary assessments of availability of materials for use in the listed layers.

#### 9.5. In Table 1

- 9.5.1. The SAR Index is the sum of the Liquid Limit, the Plastic Limit and the percentage passing the 0,075mm sieve, expressed as a number (the sum of Liquid Limit and Plastic Limit shall be taken as 45 if tests for these limits cannot be performed by virtue of the nature of the material);
- 9.5.2. The grading modulus is the sum of the cumulative percentages of material retained on the 2.00; 0.425 and 0.075mm sieves divided by 100;
- 9.5.3. The maximum CBR swell is determined at 100% of modified AASHTO density;
- 9.5.4. The strength after compaction of stabilised layers is the unconfined compressive strength (UCS) determined when applying the curing times and methods as shown in Table 2;
- 9.5.5. Activity of the formation material SSB, SB, A and B layers should always be less than 1.2.

Stabilising Agent	Type of	Curing	Reference
	Cure	time	
Cement or	Normal	7 d	TMH1 method A14
cement/slag			
Lime or lime/slag	Accelerated	48 h	Appendix C of M5, except
			that curing temperatures
			shall be 50°C

 Table 2: Recommended stabilising procedures

- 9.6. For bulk earthworks, the severity of the material in terms of collapse potential and dispersiveness should be evaluated where material is to be utilised in embankments. Problematic materials in terms of collapse potential and dispersivenes should be avoided at all costs.
- 9.7. For bulk earthworks, where material has activity greater than 1.2 and CBR less than 5%, undercut or insertion of appropriate geotextile for separation, reinforcement and control of change in moisture content should be done and approved by the Engineer.
- 9.8. Where pedogenic materials are used and accepted as such by the Engineer, the requirements given in Table 1 are modified as follows to allow for their anomalous behaviour.
- 9.8.1. The SAR Index and grading modulus requirements shall not apply.
- 9.8.2. The maximum passing the 0,075mm sieve for sub-ballast is increased to 25%.
- 9.8.3. The maximum PI for all materials is increased by 25%.
- 9.8.4. The compaction and CBR requirements remain unaltered.
- 9.9. Where the sub-ballast layers are stabilised, the requirements given in Table1 are modified as follows:-
- 9.9.1. For Material to be stabilised:-
- 9.9.1.1. The SAR Index, minimum grading modulus, PI and maximum CBR swell requirements shall not apply;

- 9.9.1.2. If the stabilising agent is cement, the upper limit of the percentage by mass passing the 0.075mm sieve is increased to 25
- 9.9.1.3. In earthworks for 26t axle loads, the minimum grading modulus and grain size distribution requirements for the Layer SB material may be as given for Layers A material provided that the percentage by mass passing the 0.075mm sieve does not exceed 30
- 9.9.1.4. In all cases the initial consumption of lime (ICL) should be met first before initiation for stabilisation or modification of the material.
- 9.9.2. For stabilised material:-
- 9.9.2.1. The PI after stabilisation shall not exceed 6;
- 9.9.2.2. After compaction to the specified in situ density, the percentage loss shall not exceed 14 when tested in accordance with SANS 3001-GR55. Samples of the Layers SB material shall be brushed only after the final cycle.
- 9.10. Where used without stabilisation in the sub-ballast layers, all rock, and especially residual fine-grained sedimentary rock material shall comply with the following 10% FACT requirements when tested in accordance with SANS 3001-AG10:-
- 9.10.1. Minimum crushing strength of dry 110kN material
- 9.10.2. Minimum ratio of the crushing 75% strengths of wet (24 h soaking) to dry material.

#### 10. Placing of materials

- 10.1. Structural Layers shall be placed to the dimensions in Fig.2 except that in cuttings or shallow fills. Layers other than the top structural layer or portions thereof shall be omitted if the in situ material complies with the requirements specified for the omitted material, subject to confirmation by the Engineer.
- 10.2. The top structural layer shall be constructed in every case.

10.3. In hard cuttings, where excavation to the underside of the sub-ballast Layer within the tolerances specified in 16 is not possible, the cutting shall be over-excavated, backfilled and compacted to the underside of that Layer with material complying with the requirements for the Layer immediately below. If any sub-ballast Layer(s) has (have) to be stabilised, the over-excavation and backfilling shall be done to the underside of the lowest stabilised Layer.

#### 11. <u>Compaction</u>

- 11.1. The standard of compaction shall be as shown in Table 1. The contractor shall be solely responsible for attaining the minimum densities and strengths specified. In addition to the tests referred to in 10.4.1 and 10.4.2, the Contractor shall make use of the dynamic cone penetrometer as often as may be necessary to ensure that a uniformly high standard of compaction is achieved.
- 11.2. Irrespective of density requirements, each Layer shall be rolled at optimum moisture content with a minimum of 3 passes of a suitable roller.
- 11.3. Acceptable in situ material below undercuts and at the base of fills shall be compacted to the density specified for the relevant Layer to a depth of 150mm.

#### 12. <u>Stabilisation</u>

- 12.1. Stabilisation shall be in accordance with specification S413 using approved equipment to produce thorough and uniform mixing to the full depth of each Layer.
- 12.2. Mix designs shall be submitted for approval by the Engineer prior to commencement of construction.
- 12.3. If required by the Engineer, samples of the material to be stabilised and the proposed stabilising agents shall be submitted together with the mix design.

- 12.4. Trail strips shall be laid for approval of the Engineer before work on stabilised Layers proceeds.
- 12.5. Payment will be made for approved final strips forming part of the Works.

#### 13. <u>Test Materials</u>

#### 13.1. General

- 13.1.1. The contractor shall erect field laboratories as necessary for testing materials and determining standards of compaction. The equipment provided by the Contractor shall be adequate for all the necessary tests in accordance with the procedures laid down in SANS 3001.
- 13.1.2. The Contractor shall provide full-time competent staff to carry out the tests, and shall maintain a record, in approved form, of all tests carried out. Copies of such records shall be submitted to the Engineer within 2 working days of completion of each test.
- 13.1.3. The costs of carrying out all tests except check tests ordered by the Engineer, shall be borne by the Contractor and shall be included in the scheduled rates for earthworks.
- 13.2. Check tests
- 13.2.1. The Engineer may order check tests to confirm the Contractor's test results, which determine material classification or standard of compaction. These check tests shall be undertaken by the Contractor under conditions decided by the Engineer.
- 13.3. Material properties
- 13.3.1. Although Transnet may supply information concerning the classification of the soil likely to be encountered during the course of the contract, the onus nevertheless rests on the Contractor to carry out, as the work proceeds, such tests as are necessary to ensure that the soils used are in accordance with the standards specified.
- 13.4. Control Tests
- 13.4.1. The standard of compaction shall be established by field density determination using the sand replacement method. Nuclear instruments for control of density and moisture content will be permitted, provided that:-

- 13.4.1.1. only instruments approved by the Engineer are used;
- 13.4.1.2. the instruments are in a state of proper calibration and wet density bias is not introduced;
- 13.4.1.3. the dry density as determined by the use of the instrument does not vary by more that 3% from that determined by the sand replacement method;
- 13.4.1.4. the equipment for field density tests by the sand replacement method is available on the site at all times.
- 13.4.2. Unless otherwise permitted by the Engineer, the number of tests performed by the Contractor to determine compliance with the requirements in Table 1 shall be:-
- 13.4.2.1. at least two set of test to determine the material properties for every 5000m<sup>2</sup> of competed layer below the sub-ballast layer and at least two set of tests per 2000m<sup>2</sup> of completed sub-ballast layer;
- 13.4.2.2. at least 3 density test per completed layer for each day's production, subject to a minimum of one test for every 1000m<sup>2</sup> of completed layer;
- 13.4.2.3. at least 2 CBR test per 5000m<sup>2</sup> of completed sub-ballast layer, A layer, B layer and bulk earthworks layer.

#### 14. <u>Off-tracking platforms</u>

- 14.1. Off tracking platforms for ballast tamping machines shall be constructed at the sites indicated and to the dimensions and levels specified.
- 14.2. The platforms shall be constructed to the same standards as those of the adjacent earthworks except that layer A material compacted to not less than 95% of modified AASHTO density, shall be used in place of layer SB and SBB.

#### 15. <u>Stream Diversions Inlets and outlets of bridges and culverts</u>

15.1. The Contractor shall construct the earthworks for stream diversions and for inlets and outlets of bridges and culverts to the lines and levels specified.

#### 16. <u>Haul Roads</u>

- 16.1. The Contractor shall construct and maintain all haul roads necessary for the execution of the works.
- 16.2. Where the route has been designated by the Engineer, the Contractor shall follow such route.

#### 17. <u>Haulage</u>

17.1. Where the Contractor, at his own request, is permitted by the Engineer to undertake the work in order other than specified, overhaul and free haul will be calculated as though the work was performed in accordance with the specified order of work.

#### 18. <u>Service Roads</u>

- 18.1. The Contractor shall construct a service road as shown on the drawings.
- 18.2. The road shall be suitable for an unloaded 7 ton flat truck to travel with reasonable ease and safety at a speed of 25 km/h.
- 18.3. The road shall be graded and handed over in good order on completion of the contract.
- 18.4. The following geometric standards shall apply:
- 18.4.1. Minimum width : 4m

- 18.4.2. Cross fall : 1 in 15 to 1 in 40
- 18.4.3. Maximum local depressions : 50mm and bumps
- 18.5. In all cases, effective drainage of the road shall be provided to prevent ponding. Unless otherwise specified, the cross fall shall be in a direction away from the earthworks.
- 18.6. The road shall have a foundation layer consisting of a 300mm thick layer B over bulk earthworks, both constructed to comply with §9.
- 18.7. Where specified, a wearing course, complying with the following, shall be provided over the foundation layer:

18.7.1.	Thickness (minimum)	: 150mm
18.7.2.	Percentage by mass passing	: 10 to 40mm
	the 0.075mm sieve	
18.7.3.	PI	: 8 – 17
18.7.4.	Compaction (minimum)	: 93% of modified AASHTO density
18.7.5.	Minimum CBR after	: 15
	Compaction (minimum)	:

18.8. Wearing course shall comply with the requirement of TRH 20, Table 1 in terms of the maximum aggregate size, grading coefficient and the shrinkage product.

#### 19. <u>Tolerances</u>

- 19.1. Permissible deviations of the finished work shall be as listed in SANS 1200 DN for Degree of accuracy II with the exception of the formation level for which a deviation of + 20mm shall apply. In addition, the plans of the formation when tested with a 3m straightedge shall have no deviation exceeding 20mm, subject to adjustment as necessary for vertical curves.
- 19.2. The tolerances on the thickness of the layers specified in Table 1 shall be
  + 20mm for each of the sub-ballast layers SSB and SB and + 50mm for

each of the layers A and B. The permissible deviation of the finished level of the bulk earthworks immediately below layer B shall be + 100mm.

19.3. Permissible deviations of moisture content during compaction and of density obtained after compaction shall be as listed in SANS 1200D for Degree of Accuracy II.

#### 20. <u>Measurement and Payment</u>

- 20.1. Measurement and payment for earthworks will be as specified in SANS 1200D and SANS 1200 DN except for the following:-
- 20.1.1. Excavation and stockpiling of topsoil will be measured in cubic metres in cut computed from depths directed by the Engineer.
- 20.1.2. Over-excavation, backfilling and compaction described in 10.3 will be measured in square meters of surface treated. Scheduled rates shall include the cost of removal of the non-excavated material to fill or spoil; the provision of suitable backfill material and compaction and finishing within the specified tolerances.
- 20.1.3. Check tests will be measured by the number of tests confirming the Contractor's results. Scheduled rates shall include the cost of all labour equipment and consumable required to undertake each test.
- 20.2. The service road will be measured in square meters to the neat dimensions specified. Scheduled rates shall include the cost of forming, shaping and compacting. Cuts and fills exceeding 200mm in depth to form the foundation layer will be paid for separately.

## **APPENDIX A**

### **COMPARABLE ROAD MATERIALS**

#### This information is provided as a guide only

Layer	CBR Range	Unified	AASHTO
SSB	>60	GW	A-1-a
		GC	
			A-1-b
SB	30 - 60	GP	A-2-4
		GH	
		SW	
A	20 - 30	SC	
		SP	A-2-5
		SM	A-3
		SM	
В	10 - 20	HL	A-2-6
		CI	A-2-0
		CL	A-2-7
			A-4
			A-5
			A-6