


TYPICAL LAYOUT OF SUBSTATION SHOWING REQUIRED EARTHING CONNECTIONS

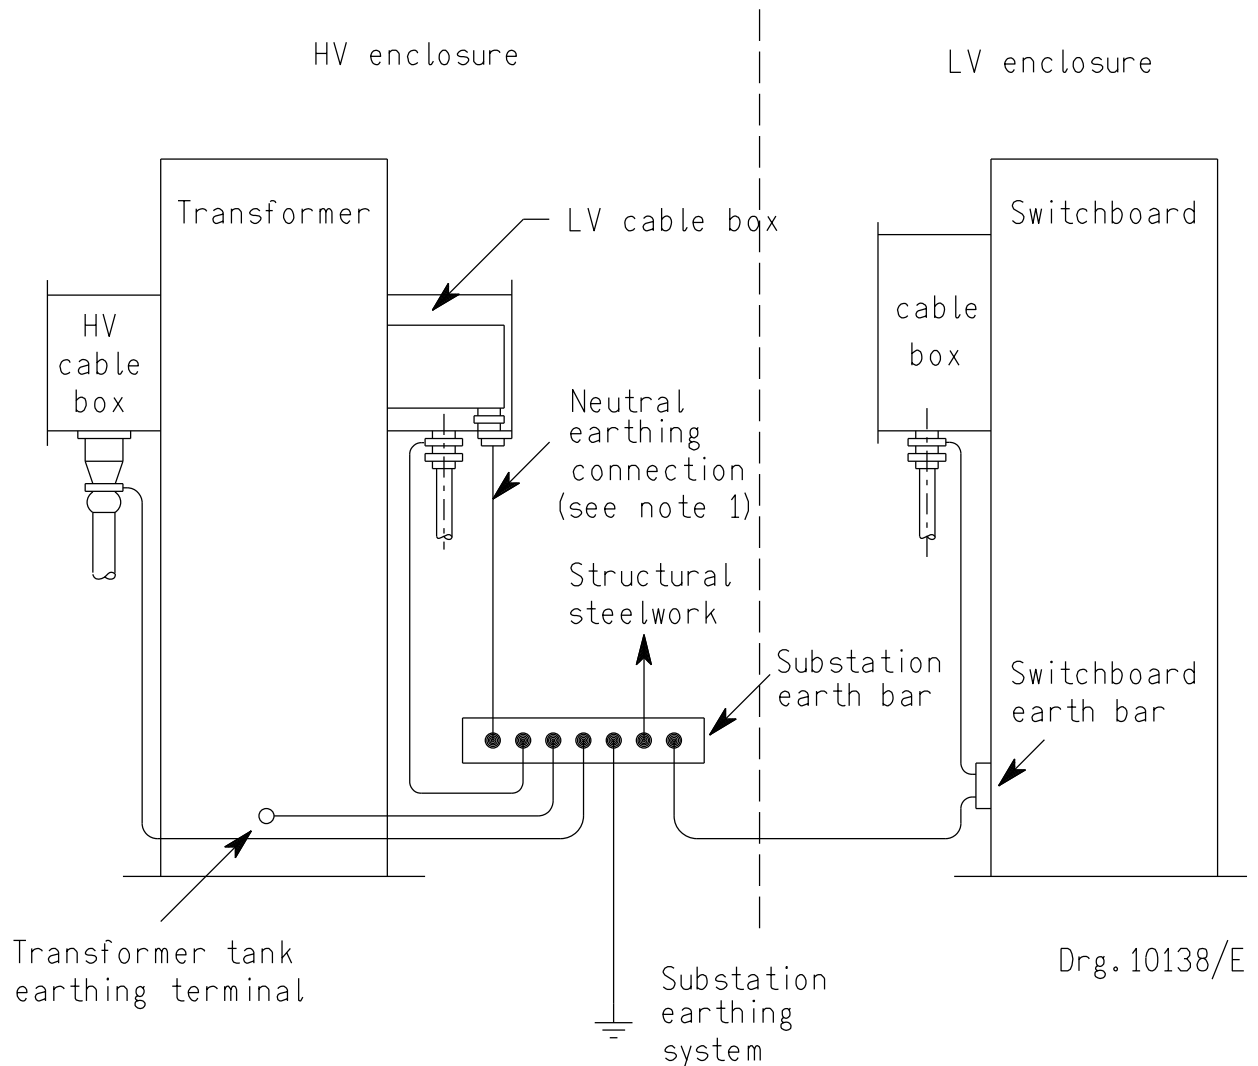

NOTES :

GENERAL: make earth connections to structures and equipment at points specifically provided for this purpose. Do not make earth connections to bolts or clamps designed for mechanical support because these may be removed temporarily or permanently (e.g. during maintenance work or alterations to the structure).

NOTE 1: Normal Eskom practice is to earth the neutral at the incomer in the switchboard.

THE C.A.D. REFERENCE NUMBER IS:
[100,164]00393EC27.R00



DRAWN
GETEKEN

H.G.

04/04
89

CHKD
NAGES

AUTH
MAS

DvB
AUG 89

BS
AUG 89

REV

0

DATE
DATUM

EARTHING STANDARDS

0.54/393

SHEET C27

DRG. TEK
REGISTR

393C27.DGN