

Kusile Power Station Supply and Delivery of Gearboxes
 Technical Specifications Supplementing the SOW KUS-20250534

item	Material number	Name plate
4	0648212	 A rectangular metal nameplate with a red background and black text. The text includes: TYPE HD0 110-3 LP L 1 G 225, CODE 2FB6301AH1000, 14226566050/2, B3, 0-10, and BONFIGLIOLI POWER TRANSMISSION 27.11.608.2030.
3	0710056	 A rectangular metal nameplate with a black background and white text. The text includes: SIEMENS 011 571 2000, S/N. JHK1410 479-1408-820, TYPE - KZ148-LA132-SP4E-L80-GHA, n2 7,6 / min, RATIO 191,02:1, MTG. B5-02-B-2A, OIL 30,1 L, MTR. 5,5 kW, 400 V, 11,6 A, DELTA CONN, n1 1455 / min, Kg, IS.CL F IP 55, 4 POLE 50 HZ, Brake L80 Nm, 180 V, DC Hz.

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

6	0756238	
7	0710060	

Kusile Power Station Supply and Delivery of Gearboxes
 Technical Specifications Supplementing the SOW KUS-20250534

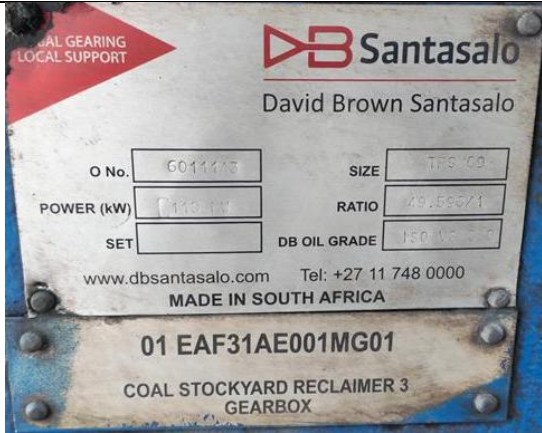
14	0700664	
13	0700696	

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

15	0662538	DATI TECNICI RIDUTTORE - GEARBOX TECHNICAL DATA Coppia nominale Nominal torque Nm 220000 Coppia massima Max. output torque Nm 340000 Rapporto Ratio 1: 35.8 RPM max. in entrata Max. input speed rpm 800 Velocità di scorrimento Sliding speed mm/s 0.5 Quantità olio Oil quantity lit T.B.D. ± 10% Peso secco/olio Dry weight kg 1950 ± 10% Valore prodotto Product Code 319 L2 35.8 FP SF COAV A GOA Valore prodotto/cliente Customer product code Attenzione! Attention! Verificare il corretto montaggio e l'olio applicato al motore prima di avviare il motore. <table><tr><td>DESIGNATION</td><td>PART NUMBER</td><td>MASS</td></tr><tr><td>HYDRAULIC MOTOR</td><td>HMB - 200 - S3 - S03</td><td>265 Kg</td></tr><tr><td>HYDRAULIC GEARBOX</td><td>319 L2 35.8 FP SF COAV A GOA</td><td>1950 Kg</td></tr></table> Designed by WTS Checked by CS TURNKEY HYDRAULICS	DESIGNATION	PART NUMBER	MASS	HYDRAULIC MOTOR	HMB - 200 - S3 - S03	265 Kg	HYDRAULIC GEARBOX	319 L2 35.8 FP SF COAV A GOA	1950 Kg
DESIGNATION	PART NUMBER	MASS									
HYDRAULIC MOTOR	HMB - 200 - S3 - S03	265 Kg									
HYDRAULIC GEARBOX	319 L2 35.8 FP SF COAV A GOA	1950 Kg									
16	0681577										

OEM: Turnkey

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

18	0703897	 A blue metal plate with white and yellow text. The text includes: Bonfiglioli Riduttori South Africa, Type X HDD 130 3 LP R 2 VP LSS, Option ZA01, Code JB00042138, Batch 07/2023, Ratio i = 59, M_{n2} (@1500 rpm), Mount. pos. B3, P_{n1} (@1500 rpm), Oil qty. Approx. 17/07/23, Remarks FLSMIDT, Date, Serial 1424608215/1, Tel +27 11 608 2030.
19	0648473	 A silver metal plate with black and red text. The text includes: LOCAL GEARING LOCAL SUPPORT, David Brown Santasalo, O No. 60111113, SIZE TFS 100, POWER (kW) 110, RATIO 49.500/1, SET, DB OIL GRADE 150, www.dbsantasalo.com, Tel: +27 11 748 0000, MADE IN SOUTH AFRICA, 01 EAF31AE001MG01, COAL STOCKYARD RECLAIMER 3 GEARBOX.

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

24	0647322	 BAUER A DIVISION OF HUDACO TRADING (PTY) Ltd <table><tr><td>3-Motor No. ZA</td><td>216486-4</td><td>2012</td></tr><tr><td>Type</td><td colspan="2">BK90Z-51VR/D13MA4-TF-S/E075B9HA-SP-SA</td></tr><tr><td>hp</td><td>7,5</td><td>kW</td></tr><tr><td>Motor</td><td>1450 rpm</td><td>400 V</td></tr><tr><td>Gear</td><td>6,2 rpm</td><td>50 Hz</td></tr><tr><td>cos φ</td><td>0,87</td><td>14,9 A</td></tr><tr><td>Isol. Cl.</td><td>F</td><td>IP 65 IMH4/1EC35</td></tr></table> BAUER A DIVISION OF HUDACO TRADING (PTY) Ltd TEL.: (011) 828-9715 EP GEAR LUBRICANT VISCOSITY ISO VG 320 Change at 10 000 hours / 2 years S/N 216486-4 7,5 BK 90Z H 4	3-Motor No. ZA	216486-4	2012	Type	BK90Z-51VR/D13MA4-TF-S/E075B9HA-SP-SA		hp	7,5	kW	Motor	1450 rpm	400 V	Gear	6,2 rpm	50 Hz	cos φ	0,87	14,9 A	Isol. Cl.	F	IP 65 IMH4/1EC35
3-Motor No. ZA	216486-4	2012																					
Type	BK90Z-51VR/D13MA4-TF-S/E075B9HA-SP-SA																						
hp	7,5	kW																					
Motor	1450 rpm	400 V																					
Gear	6,2 rpm	50 Hz																					
cos φ	0,87	14,9 A																					
Isol. Cl.	F	IP 65 IMH4/1EC35																					

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

48	0654830	Pos 1		
		Article No	GS 125.3	
		Description	AUMA-WORM GEARBOX	
		Drawing No		
		Change Index		
		Quantity	3	
		Delivery Plan	ordered	3
			Delivery Week	03/2010
		Product Characteristics		
		Mounting position	0	
		Size	GS125.3-F16-N	valve attachment F16 without spigot
		Version	LL	input shaft clockw.:counter-clockw. rotation o.valve shaft
		Swing angle	D-2WE	multi-turn, 2nd input shaft
		Housing material	GG	Housing cast iron
		Worm wheel	BZ	bronze
		Gearbox input	EW30	input shaft d=30mm
		Handwheel	AH630-30-BG	
		Coupling	KG-60	mm keyway acc. to DIN6885.1
		Enclosure	IP68-3	with grub screw
		Temperature version	N-40-80	max. 3m head of water, with pointer cover
		Lubricant	F15	-40C - +80C
		Sealing elements	00	ALVANIA 1029
		Korrosionsschutz	KN	NBR (S+D)
		Colour	R7035	light grey
		Paint. instruct. LV	N1.003.4-KN	140µ film thickness
		Max. output torque	4000	Nm for 100% output torque
		Max. input torque	192	Nm for 100% output torque
		Name plate:	GB-AL	worm wheel bronze
		Reduction ratio i	52:1	
		Inspect. acc. to KV	02.03.014.01	Inspect. record/works certif.
		Doc. device type	08000000000000	
		Doc. device version	00000000000000	
		Doc. language	EN	English

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

46	0654592	3 General technical data 3.1 Gear unit (further data see BTD 6 0HFC10 AU001) Type of gear unit (Bevel planetary gear) KPV-gear unit Gear unit size 1750 S Machine-no. 1292/1293/1294/1295/1296 Number of gear units for each boiler piece 5 Dimensions (L x B x H) approx. m 3,02 x 2,66 x 1,91 Weight kg 31900 Oil volume L approx. 1310 Gear unit effective output kW 920 Input speed min⁻¹ 990 Output speed min⁻¹ 28,49 Gear ratio i 34,75 Manufacturer of gear unit Hitachi Power Europe GmbH
47	0654956	<u>clean out conveyor drive</u> motor rating kW 0,55 transmission ratio - 352,25 input speed min-1 1375 output speed min-1 3,9

Kusile Power Station Supply and Delivery of Gearboxes Technical Specifications Supplementing the SOW KUS-20250534

22	0644872																															
OEM: Demag																																
23	0629760	DATI TECNICI REDUTTORE - GEARBOX TECHNICAL DATA <table><tr><td>Coppia nominale Nominal torque</td><td>Nm</td><td>220000</td></tr><tr><td>Coppia massima Max. output torque</td><td>Nm</td><td>340000</td></tr><tr><td>Rapporto Ratio</td><td>lt</td><td>35,8</td></tr><tr><td>Viri max. in entrata Max. input speed</td><td>rpm</td><td>600</td></tr><tr><td>Velocità di rotazione Rotational speed</td><td>rpm</td><td>1500</td></tr><tr><td>Peso netto Net weight</td><td>kg</td><td>1950 ± 10%</td></tr><tr><td>Capacità lubrificante Lubricant capacity</td><td>kg</td><td>319 L2 35,8 FP SF COAV A GOA</td></tr></table> NOTE Viti di fissaggio all'albero Bolt fastening to shaft M10 x 100 mm Torque 20 Nm <table><tr><th>DESIGNATION</th><th>PART NUMBER</th><th>MASS</th></tr><tr><td>HYDRAULIC MOTOR</td><td>HMB - 200 - S3 - S03</td><td>265 Kg</td></tr><tr><td>HYDRAULIC GEARBOX</td><td>319 L2 35,8 FP SF COAV A GOA</td><td>1950 Kg</td></tr></table> Designed by WTS Checked by CS Approved by TURNKEY HYDRAULICS 	Coppia nominale Nominal torque	Nm	220000	Coppia massima Max. output torque	Nm	340000	Rapporto Ratio	lt	35,8	Viri max. in entrata Max. input speed	rpm	600	Velocità di rotazione Rotational speed	rpm	1500	Peso netto Net weight	kg	1950 ± 10%	Capacità lubrificante Lubricant capacity	kg	319 L2 35,8 FP SF COAV A GOA	DESIGNATION	PART NUMBER	MASS	HYDRAULIC MOTOR	HMB - 200 - S3 - S03	265 Kg	HYDRAULIC GEARBOX	319 L2 35,8 FP SF COAV A GOA	1950 Kg
Coppia nominale Nominal torque	Nm	220000																														
Coppia massima Max. output torque	Nm	340000																														
Rapporto Ratio	lt	35,8																														
Viri max. in entrata Max. input speed	rpm	600																														
Velocità di rotazione Rotational speed	rpm	1500																														
Peso netto Net weight	kg	1950 ± 10%																														
Capacità lubrificante Lubricant capacity	kg	319 L2 35,8 FP SF COAV A GOA																														
DESIGNATION	PART NUMBER	MASS																														
HYDRAULIC MOTOR	HMB - 200 - S3 - S03	265 Kg																														
HYDRAULIC GEARBOX	319 L2 35,8 FP SF COAV A GOA	1950 Kg																														

Kusile Power Station Supply and Delivery of Gearboxes
 Technical Specifications Supplementing the SOW KUS-20250534

25	0645224	 The image shows a metal specification plate for a Hansen industrial gearbox. The plate contains the following information: Logo: Hansen® industrial gearboxes Website: http://www.hansenindustrialgearboxes.co.za Address: P.O. BOX/POSBUS 8449, ELANDSFONTEIN 1406 Phone: TEL: 011 400 7121, FAX: 011 400 7120 Type: QHR62 CLN Ratio: 16:1 NO: 40720R10038 Speed: 1500/93.98 ABS: 105 St: 5.39 Output: 566 Oil Capacity: 90 Weight: 4806 Use Only: USE ONLY EXTREME PRESSURE OIL, GEBRUIK SLEGS UITERSHOOGSTE OIL Recommended Visc: 220 Recommended Visc: 220 EP2: EP2
28	0664366	

Kusile Power Station Supply and Delivery of Gearboxes

Technical Specifications Supplementing the SOW KUS-20250534

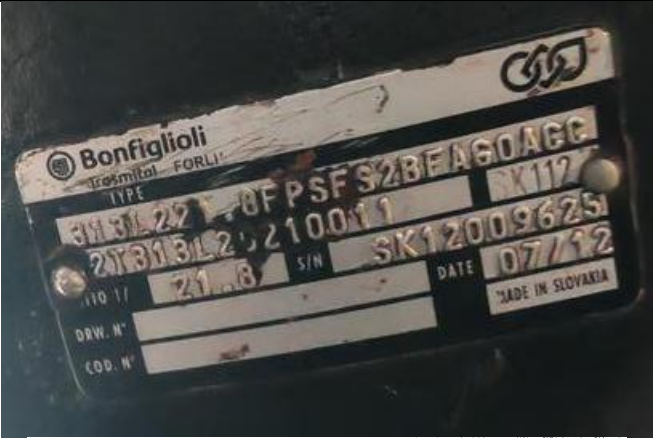

DATI TECNICI FRENO - BRAKE TECHNICAL DATA		
Coppia frenante Braking torque	Nm	260 ± 10%
Pressione di completa apertura Complete opening pressure	bar	20
Pressione max di comando Max operating pressure	bar	320
DATI TECNICI RIDUTTORE - GEARBOX TECHNICAL DATA		
Coppia nominale Nominal torque	Nm	30300
Coppia massima Max. output torque	Nm	45000
Rapporto Ratio	1:	266
Giri max. in entrata Max. input speed	rpm	4000
Usare olio con caratteristiche E.P. a norme ISO VG 150 SAE 80W/90 rispondente a: MIL-L-2105C ± API GL5 Use oil with EP characteristics according following norms: ± ISO VG 150 SAE 80W/90 according ± MIL-L-2105C or API GL5		
Quantita' olio Oil quantity	lt	20 ± 10%
Peso senz'olio Dry weight	kg	295 ± 10%
Codice prodotto Product Code	2T311R4266000A	
Codice prodotto/cliente Customer product code		
 Viti di fissaggio al telaio macchina consigliate Recommended fixing screws to the machine frame	M16x2-8.8  200Nm	

DESIGNATION	PART NUMBER	MASS
HYDRAULIC MOTOR	SAI-GMI-100-7-II-D481	22 kg
HYDRAULIC GEARBOX	2T311R4266000A	295 kg

OEM:Turnkey Hydraulics

OEM:Turnkey Hydraulics

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

26	0662392	 Bonfiglioli Trestmitol FORLI' TYPE 313 L2 21.8 FP SF S2B A GDA 21313 L2 210011 110 11 21.8 S/N SK120096251 DATE 07/12 MADE IN SLOVAKIA <table><tr><td colspan="3">DATI TECNICI RIDUTTORE - GEARBOX TECHNICAL DATA</td></tr><tr><td>Coppia nominale <i>Nominal torque</i></td><td>Nm</td><td>45400</td></tr><tr><td>Coppia massima <i>Max. output torque</i></td><td>Nm</td><td>55000</td></tr><tr><td>Rapporto <i>Ratio</i></td><td>1:</td><td>21.8</td></tr><tr><td>Giri max. in entrata <i>Max. input speed</i></td><td>rpm</td><td>2000</td></tr><tr><td colspan="3">Ugelli olio con antiripercussione I.P. a sfera ISO VG 150 SAE 80W/90 (equivalente a: NL-GL-210SC - 4P GL3 Oil of ISO VG 150 (equivalente a: NL-GL-210SC - 4P GL3 SAE 80W/90 according to: NL-GL-210SC - 4P GL3)</td></tr><tr><td>Quantità olio <i>Oil quantity</i></td><td>lit</td><td>12 ±10%</td></tr><tr><td>Peso senza olio <i>Oil weight</i></td><td>kg</td><td>280 ±10%</td></tr><tr><td>Codice prodotto <i>Product Code</i></td><td colspan="2">313 L2 21.8 FP SF SDON A GDA</td></tr><tr><td>Codice prodotto/cliente <i>Customer product code</i></td><td colspan="2"></td></tr><tr><td colspan="3">Viti di fissaggio al telaio M16x2-8.8 Recommended fixing screws 200mm to the machine frame</td></tr></table>  TOP VIEW BATEMAN FOR APPROVAL <table><tr><td>Designed by WTS</td><td>Checked by CS</td><td>Approved by</td></tr><tr><td colspan="3"></td></tr></table> <table><tr><th>DESIGNATION</th><th>PART NUMBER</th><th>MASS</th></tr><tr><td>HYDRAULIC MOTOR</td><td>SA1-GM4-700-7-G-D40</td><td>110 Kg</td></tr><tr><td>HYDRAULIC GEARBOX</td><td>313 L2 21.8 FP SF SDON A GDA</td><td>280 Kg</td></tr></table>	DATI TECNICI RIDUTTORE - GEARBOX TECHNICAL DATA			Coppia nominale <i>Nominal torque</i>	Nm	45400	Coppia massima <i>Max. output torque</i>	Nm	55000	Rapporto <i>Ratio</i>	1:	21.8	Giri max. in entrata <i>Max. input speed</i>	rpm	2000	Ugelli olio con antiripercussione I.P. a sfera ISO VG 150 SAE 80W/90 (equivalente a: NL-GL-210SC - 4P GL3 Oil of ISO VG 150 (equivalente a: NL-GL-210SC - 4P GL3 SAE 80W/90 according to: NL-GL-210SC - 4P GL3)			Quantità olio <i>Oil quantity</i>	lit	12 ±10%	Peso senza olio <i>Oil weight</i>	kg	280 ±10%	Codice prodotto <i>Product Code</i>	313 L2 21.8 FP SF SDON A GDA		Codice prodotto/cliente <i>Customer product code</i>			Viti di fissaggio al telaio M16x2-8.8 Recommended fixing screws 200mm to the machine frame			Designed by WTS	Checked by CS	Approved by				DESIGNATION	PART NUMBER	MASS	HYDRAULIC MOTOR	SA1-GM4-700-7-G-D40	110 Kg	HYDRAULIC GEARBOX	313 L2 21.8 FP SF SDON A GDA	280 Kg
DATI TECNICI RIDUTTORE - GEARBOX TECHNICAL DATA																																																		
Coppia nominale <i>Nominal torque</i>	Nm	45400																																																
Coppia massima <i>Max. output torque</i>	Nm	55000																																																
Rapporto <i>Ratio</i>	1:	21.8																																																
Giri max. in entrata <i>Max. input speed</i>	rpm	2000																																																
Ugelli olio con antiripercussione I.P. a sfera ISO VG 150 SAE 80W/90 (equivalente a: NL-GL-210SC - 4P GL3 Oil of ISO VG 150 (equivalente a: NL-GL-210SC - 4P GL3 SAE 80W/90 according to: NL-GL-210SC - 4P GL3)																																																		
Quantità olio <i>Oil quantity</i>	lit	12 ±10%																																																
Peso senza olio <i>Oil weight</i>	kg	280 ±10%																																																
Codice prodotto <i>Product Code</i>	313 L2 21.8 FP SF SDON A GDA																																																	
Codice prodotto/cliente <i>Customer product code</i>																																																		
Viti di fissaggio al telaio M16x2-8.8 Recommended fixing screws 200mm to the machine frame																																																		
Designed by WTS	Checked by CS	Approved by																																																
																																																		
DESIGNATION	PART NUMBER	MASS																																																
HYDRAULIC MOTOR	SA1-GM4-700-7-G-D40	110 Kg																																																
HYDRAULIC GEARBOX	313 L2 21.8 FP SF SDON A GDA	280 Kg																																																
1	0649044	Gearbox Seal BMG																																																
2	0649043	Gearbox Seal BMG																																																
5	0649042	Gearbox Seal BMG																																																
9	0649045	Gearbox Seal BMG																																																

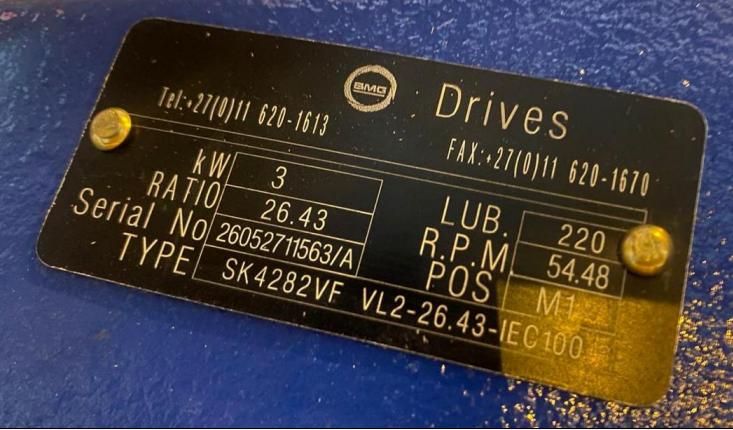
Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

4	0648212 (superseded with 0770898) same specification			
8	0683105(replaced with 0783604)			

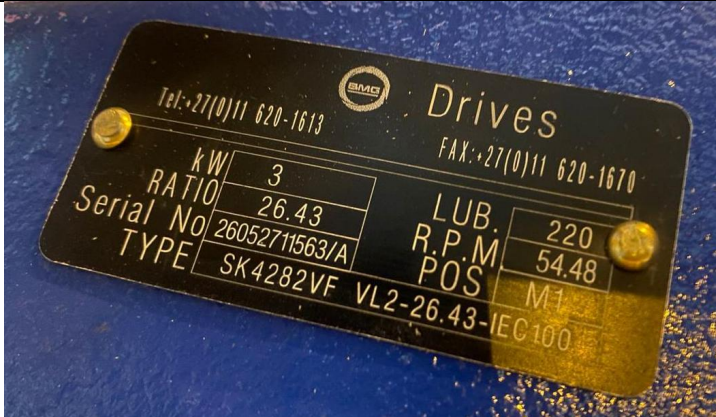
Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

17	0659892	Techn. Daten: Pm = 55 kW n1 = 708 min-1 n2 = 20.8 min-1 i = 34,04:1 T2mot = 21000 Nm KA = 1,8 Hazemag Sachnummer / Reference no. 5539 700 509 20 00 <table><tr><td>1</td><td>%</td><td>Techn. Daten geändert</td><td>05.01.2011</td><td>Fröhlich</td></tr><tr><td>Änd.-Change Inc.</td><td>Index Ind. av. Inc.</td><td>Änderung / Modification</td><td>Datum / Date</td><td>Name / Designer</td></tr><tr><td colspan="2">Schutzvermerk ISO 16016 beachten</td><td colspan="3">All rights reserved. Observe ISO 16016</td></tr><tr><td rowspan="2">Maßstab / Scale 1:5 DIN A3</td><td rowspan="2"></td><td>General Tolerances DIN ISO 2768-mK Bohrungstoleranzen DIN ISO 1302 Reihe 2</td><td>Entwurf / Design 040309</td><td>NAME SPJ</td></tr><tr><td>Fertiggestellt / Mass</td><td>kg</td><td></td></tr><tr><td>Werkstoff / Material</td><td colspan="2">Bezeichnung / Description Maßzeichnung P20 021HW 35,5</td><td colspan="2">95141^751-1C</td></tr><tr><td colspan="2"></td><td colspan="3">Ersatz für / Substitute for</td></tr></table>	1	%	Techn. Daten geändert	05.01.2011	Fröhlich	Änd.-Change Inc.	Index Ind. av. Inc.	Änderung / Modification	Datum / Date	Name / Designer	Schutzvermerk ISO 16016 beachten		All rights reserved. Observe ISO 16016			Maßstab / Scale 1:5 DIN A3		General Tolerances DIN ISO 2768-mK Bohrungstoleranzen DIN ISO 1302 Reihe 2	Entwurf / Design 040309	NAME SPJ	Fertiggestellt / Mass	kg		Werkstoff / Material	Bezeichnung / Description Maßzeichnung P20 021HW 35,5		95141^751-1C				Ersatz für / Substitute for		
1	%	Techn. Daten geändert	05.01.2011	Fröhlich																															
Änd.-Change Inc.	Index Ind. av. Inc.	Änderung / Modification	Datum / Date	Name / Designer																															
Schutzvermerk ISO 16016 beachten		All rights reserved. Observe ISO 16016																																	
Maßstab / Scale 1:5 DIN A3		General Tolerances DIN ISO 2768-mK Bohrungstoleranzen DIN ISO 1302 Reihe 2	Entwurf / Design 040309	NAME SPJ																															
		Fertiggestellt / Mass	kg																																
Werkstoff / Material	Bezeichnung / Description Maßzeichnung P20 021HW 35,5		95141^751-1C																																
		Ersatz für / Substitute for																																	
39	0676747	A photograph of a metal nameplate for a Nord Drive Systems motor. The plate is mounted on a dark, possibly painted, metal surface. The text on the plate is stamped in a reddish-brown color. It includes the company name 'NORD DRIVESYSTEMS', the full name 'Getriebefabrik NORD GmbH & Co. KG', the address 'D-22841 Bargteheide/Hamburg', the motor type 'Type SK 4282VF VL2 IEC100', a serial number '200762844', a date '2011', a torque value '32.34 Nm', a power value '55 kW', and a mass value '140 kg'. There are also some smaller markings like '658' and 'P'. The plate has two circular mounting holes on the left and right sides.																																	

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

40	0676746	
42	0676750	

Kusile Power Station Supply and Delivery of Gearboxes
 Technical Specifications Supplementing the SOW KUS-20250534

41	0676745		 BMG Drives nameplate for unit 0676745. The plate is black with yellow text and features the BMG logo. It includes contact information: Tel: +27(0)11 620-1613 and Fax: +27(0)11 620-1670. Technical specifications are listed in a table format: kW (3), RATIO (26.43), LUB. (220), R.P.M. (54.48), Serial No (26052711563/A), POS (M1), TYPE (SK4282VF VL2-26.43-IEC100).	
44	0676751		 BMG Drives nameplate for unit 0676751. The plate is black with yellow text and features the BMG logo. It includes contact information: TEL: +27(0)11 620-1500 and FAX: +27 (0)11 620-1670. Technical specifications are listed in a table format: kW (11), RATIO (18.7), LUB (220), R.P.M. (78), Serial No (22112491110/A), POS (M4), TYPE (SK6282VFVL2-IEC160-18.70/1).	

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

	0661441			
--	---------	--	--	--

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

12	0756236	Order number/ item: 82576652 200 /Part of position 100 Description: Bevel-helical gear unit Type: X2KR110e/HU/B Quantity: 2 Remark: No product image could be generated to the following item. Serialnumber : 71.8257665202.0001-0002.23 Industry : Mining / Mineral Processing Type of application : Belt conveyors < 100 kW Type of driving machine : AC-motor Operating time per day : More than 10 hours Operating cycle / hour ED [%] : 100 Altitude [m above MSL] : 0...< 1000 Installation site : Large rooms and halls (Va >= 1.4 m/s) Ambient conditions : normal Housing design : Universal Ambient temp. min./max. [°C] : -6 / 40 Motor power, nominal PM [kW] : 75,00 Operating power PK1 [kW] : 58,70 Input speed [r/min] : 1500,0 Ratio : 12,24 Output speed [rpm] : 123 Operating torque MK2 [Nm] : 4427 Nominal power PN1 [kW] : 105,00 Nominal gear torque MN2 [Nm] : 7950 Service factor Fs : 1,79 Reference value for Fs : Operating torque output Mk2 Add. forces at input shaft end : None Add. forces at output shaft end : None Mounting position : M1 Mounting surface : F1 Shaft position : 03 Direct. of rotat. output shaft : CW Input shaft [mm] : 50k6 x 110 LSS type : Solid shaft without keyway Low speed shaft LSS [mm] : 85v6 x 131 Asbly. clear.value(bear.prel.) : Default Output coupling cover mounting : With mounting plate / without protection cover Mounting plate position : Above output shaft 3 Housing fixation : Foot mounting Type of lubrication : Splash lubrication Reduced oil level : No Oil level check : Oil level glass + oil dipstick Oil drain : Magnetic oil drain plug and oil drain valve ISO code : CLP HC 320 Synth.Oil
----	---------	--

OEM: SEW Drive

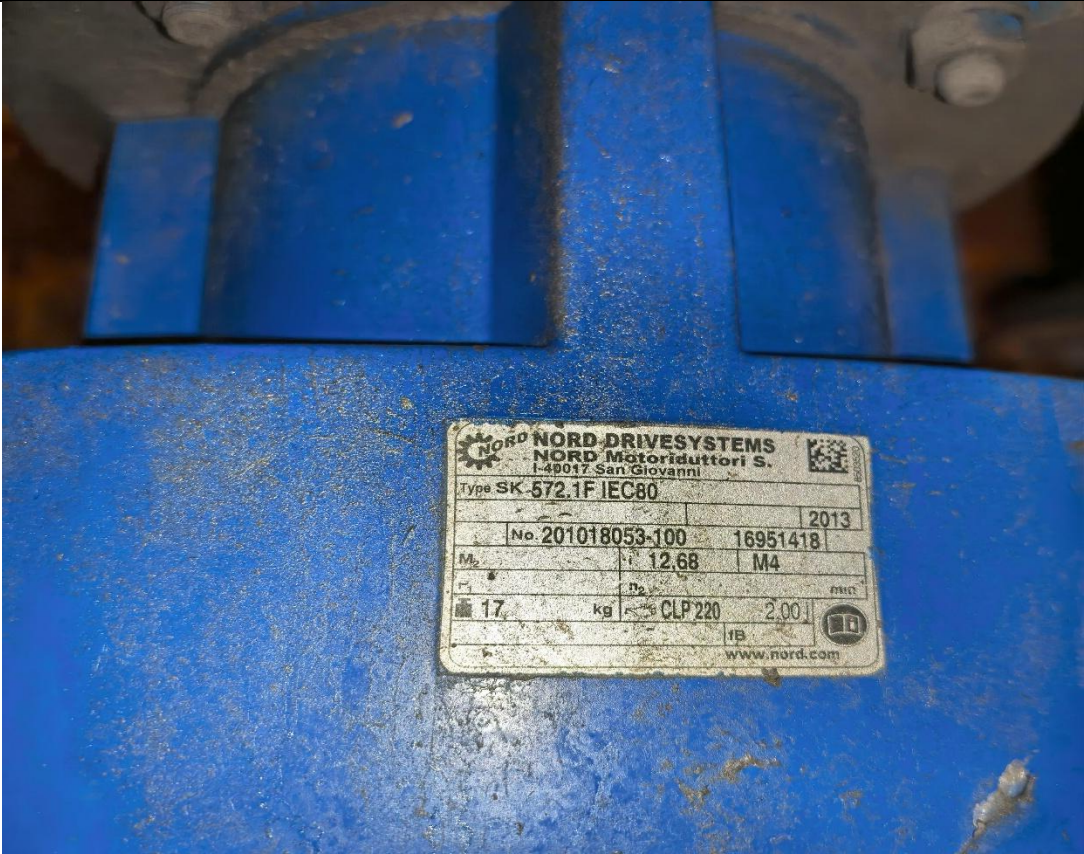
Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

35	0690184	 A photograph of a blue industrial mixer, likely a concrete mixer, with a white label affixed to its side. The label contains technical specifications and identification numbers. Below the label, a large hexagonal bolt is visible on the base of the mixer. The mixer is situated on a sandy or dusty ground. A yellow and red arrow sticker is also visible on the side of the mixer, pointing to the left.
----	---------	---

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

31	0662106	
----	---------	--

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

36	0690185	
----	---------	---

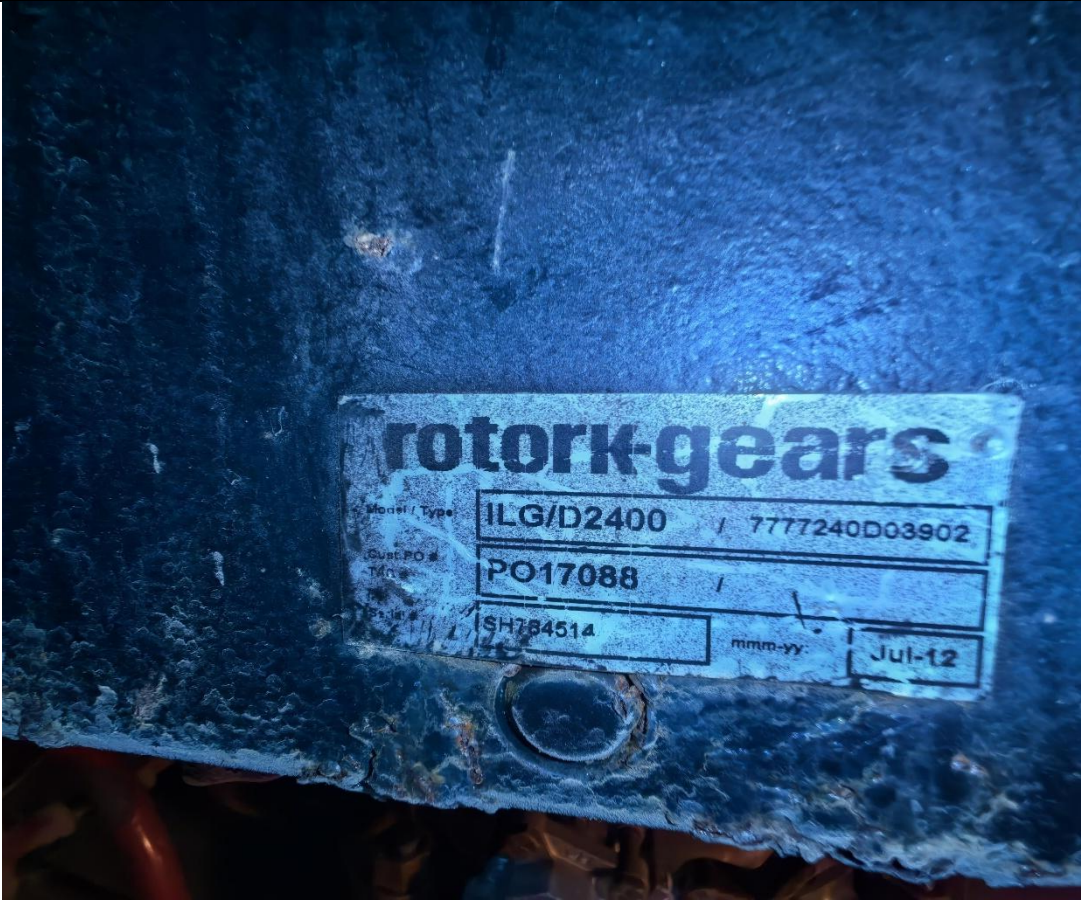
Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

33	0689928	
----	---------	--

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

31	0662106	 The image shows a close-up of a blue-painted metal gearbox housing. A yellow rectangular sign with a black octagonal "STOP" symbol and a small diagram is attached to the top left. A large silver hexagonal bolt with "ACEI" engraved on its head is positioned in the upper center. Below it, a black metal nameplate is mounted, featuring the "BHS" logo and the word "GEARBOX". The nameplate contains the following technical specifications: <table><tr><td>kw</td><td></td><td>LUB</td><td>220</td></tr><tr><td>RATIO</td><td>3.62</td><td>R.P.M.</td><td></td></tr><tr><td>Serial No.</td><td>21060911761</td><td>POS</td><td>M1</td></tr><tr><td>TYPE</td><td colspan="3">SK82 IEC250-3.62/1</td></tr></table>	kw		LUB	220	RATIO	3.62	R.P.M.		Serial No.	21060911761	POS	M1	TYPE	SK82 IEC250-3.62/1		
kw		LUB	220															
RATIO	3.62	R.P.M.																
Serial No.	21060911761	POS	M1															
TYPE	SK82 IEC250-3.62/1																	

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

30	0661440	
----	---------	---

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

38	0689904	
----	---------	--

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

37	0689929	 A photograph of a Mixtec gearbox. The gearbox is dark grey and mounted on a concrete base. A yellow label is affixed to the side of the gearbox, providing technical specifications. The label includes the Mixtec logo, contact information, and a table of specifications. The rotation direction is indicated by an arrow pointing to the left. <table><tr><th colspan="2">MIXTEC</th></tr><tr><th colspan="2">FOR MIXING TECHNOLOGY</th></tr><tr><td>ORDER No.</td><td>MEI21481</td></tr><tr><td>TAG No.</td><td>OOLFN10-AM001</td></tr><tr><td>POWER (kW)</td><td>2.2</td></tr><tr><td>SPEED (RPM)</td><td>101</td></tr><tr><td>SERIAL No.</td><td>C82199/02/1</td></tr><tr><td>LUBE TYPE</td><td>ISO VG 220</td></tr><tr><td>LUBE QTY (L)</td><td>3.5</td></tr><tr><td>ROTATION</td><td>←</td></tr></table>	MIXTEC		FOR MIXING TECHNOLOGY		ORDER No.	MEI21481	TAG No.	OOLFN10-AM001	POWER (kW)	2.2	SPEED (RPM)	101	SERIAL No.	C82199/02/1	LUBE TYPE	ISO VG 220	LUBE QTY (L)	3.5	ROTATION	←
MIXTEC																						
FOR MIXING TECHNOLOGY																						
ORDER No.	MEI21481																					
TAG No.	OOLFN10-AM001																					
POWER (kW)	2.2																					
SPEED (RPM)	101																					
SERIAL No.	C82199/02/1																					
LUBE TYPE	ISO VG 220																					
LUBE QTY (L)	3.5																					
ROTATION	←																					

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

34	0689922	 A close-up photograph of a metal gearbox housing. The housing is light-colored and shows signs of wear and dust. A black label with white text is affixed to the housing. The label contains the following information: 'NIXTEC' in red, '02001549' in black, '001 FN40AM00' in black, '0.37' in black, '205' in black, 'SERIAL No. 02300120/1' in black, 'TRACT No. 02300120/1' in black, and '02300120/1' in black. The background is slightly blurred, showing yellow and black components.
----	---------	---

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

43	0641320	
----	---------	--

Kusile Power Station Supply and Delivery of Gearboxes
Technical Specifications Supplementing the SOW KUS-20250534

10	0645223	 Dual output
----	---------	---