




TYPICAL INSTALLATION OF ROOF SUSPENDED AXIAL FAN

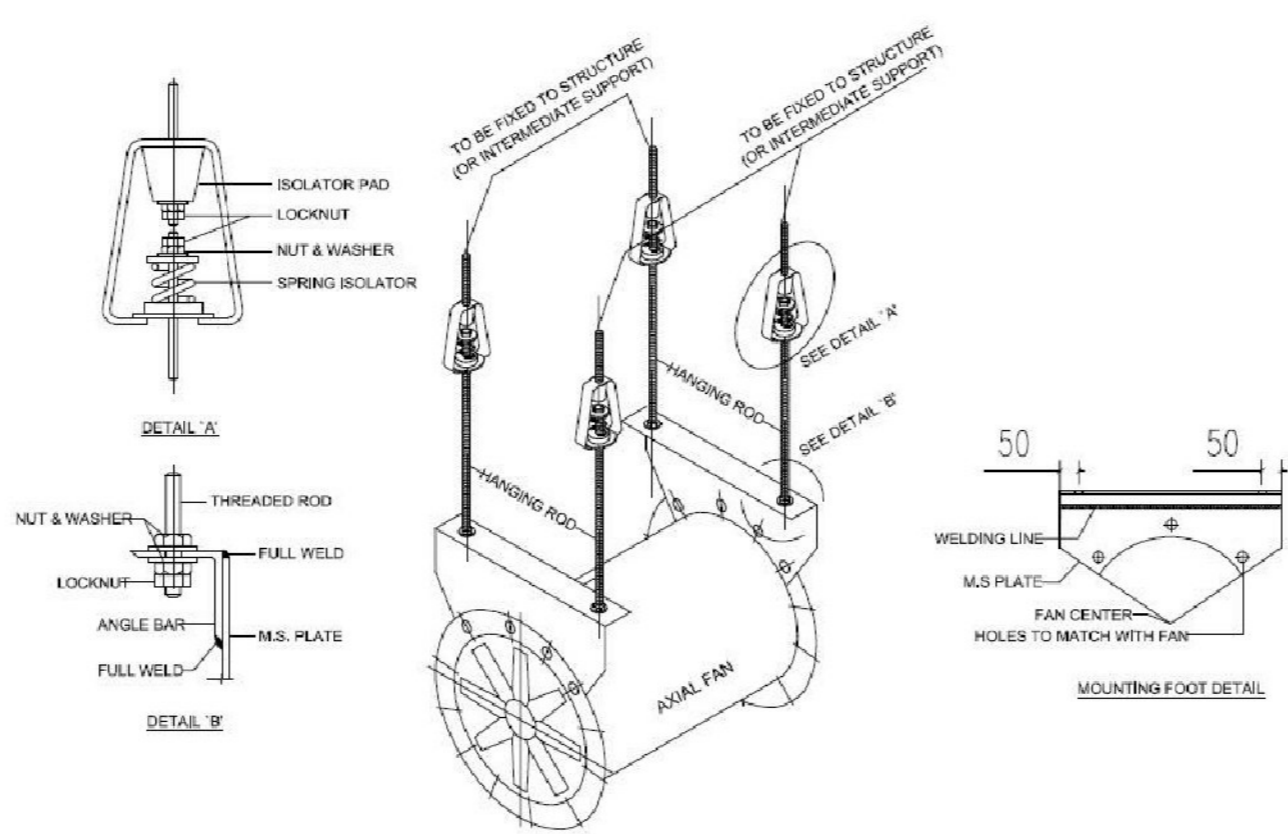

DUCT HANGER AND SUPPORTS

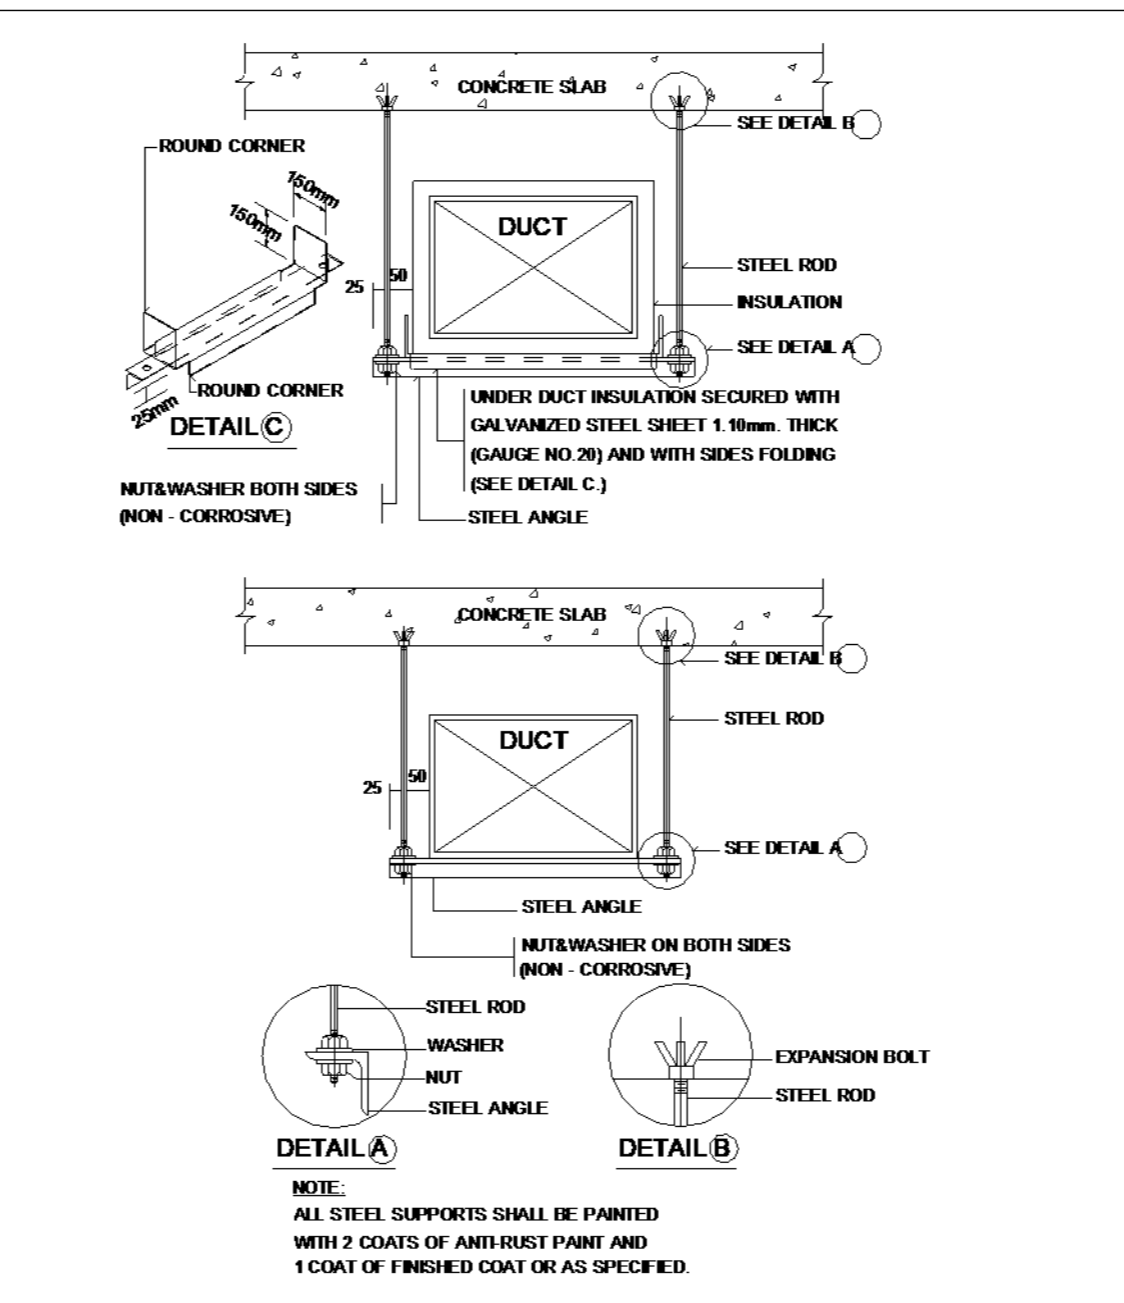

TYPICAL CEILING CASSETTE UNIT MOUNT DETAIL

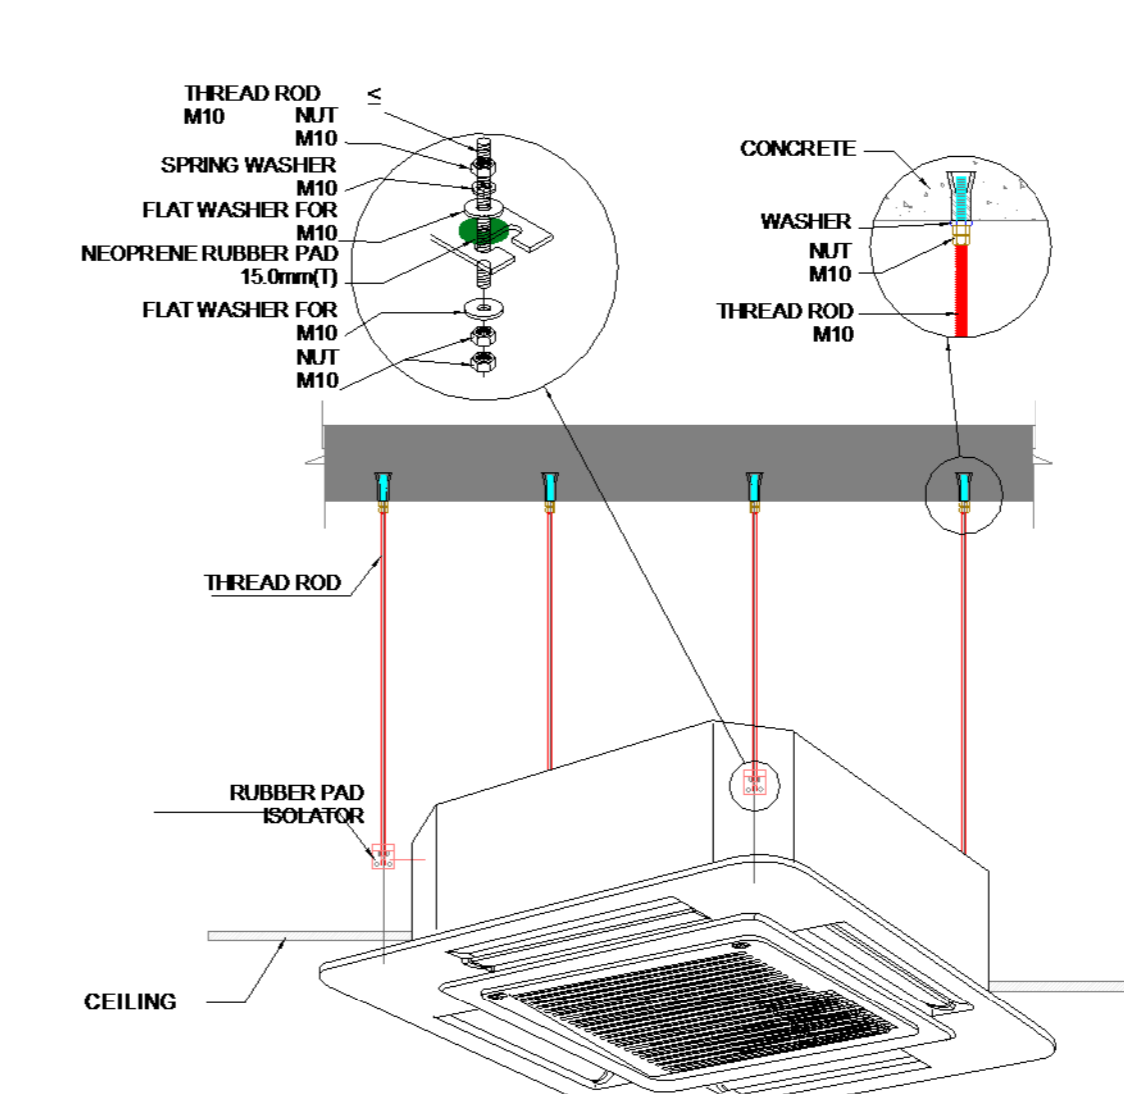

LEGEND

GENERAL	ISOLATOR (3 PHASE)
ISOLATOR (1 PHASE)	
AIR TERMINALS	
DISC VALVE (EXHAUST)	
WEATHER LOUVER	
SUPPLY DIFFUSER	
RETURN GRILLE	
MECHANICAL EQUIPMENT	
ODU (CONDENSOR UNIT)	
ODU (VRF UNIT)	
AXIAL FAN	
WALL MOUNTED AXIAL FAN	
CEILING MOUNTED AXIAL FAN	
MIDWALL SPLIT UNIT	
CEILING CASSETTE UNIT	
THERMOSTAT (AC UNIT)	
REFRIGERANT PIPING	
GAS LINE	
LIQUID LINE	
CONDENSATE	
DUCTING	
SUPPLY AIR	
EXHAUST AIR	
RETURN AIR	
FRESH AIR	
INDICATES EXISTING DUCTS & TO BE RETAINED	

- NOTES:**
- ALL WORKS TO BE EXECUTED STRICTLY IN ACCORDANCE WITH THE HEALTH AND SAFETY ACT, ACT 85 OF 1993 AS AMENDED.
  - THE CONSTRUCTION REGULATIONS SHALL BE ADHERED TO IN THE EXECUTION AND PLANNING OF WORKS
  - WORKS SHALL BE CONSTRUCTED IN ACCORDANCE WITH APPROVED SHOP DRAWINGS.
  - SHOP DRAWINGS SHALL BE ISSUED FOR APPROVAL A MINIMUM OF 14 DAYS PRIOR TO CONSTRUCTION COMMENCEMENT, SUCH SHOP DRAWINGS SHALL BE COMPLETED WITH THE ASSISTANCE OF THE MAIN CONTRACTOR AND VARIOUS TRADES AS REQUIRED TO ENSURE CO-ORDINATION PROVISIONS ARE MADE.
  - THIS DRAWING SHALL NOT BE SCALED, FIGURED DIMENSIONS ONLY SHALL BE USED.
  - THE PROVISION OF SIGNAGE AND INSTALLATION OF EXPOSED SERVICES SHALL BE IN ACCORDANCE WITH ARCHITECTS DRAWINGS.
  - EXPOSED SERVICES COLORS SHALL BE TO ARCHITECTS SPECIFICATION, CLIENT SPECIFICATION AND NATIONAL STANDARDS.
  - THIS DRAWING IS TO BE READ AND WORKS ARE TO BE EXECUTED IN ACCORDANCE WITH THE RELEVANT PROJECT SPECIFICATIONS, ENGINEERING CODES AND GOOD ENGINEERING PRACTICE.
  - PIPING SHALL BE SABS G2 MEDIUM WEIGHT, PIPING DIAMETER 200 AND LARGER MAY BE SABS 739 4.5L.
  - PIPING Ø65mm AND ABOVE SHALL BE WELDED, FLANGED OR CLAMSON COUPLED, PIPING BELOW Ø65mm SHALL BE BS SCREWED; ALL IN ACCORDANCE WITH PROJECT SPECIFICATIONS, NATIONAL REGULATIONS AND GOOD ENGINEERING PRACTICE.
  - PIPING INSULATION ON PIPING Ø200mm AND ABOVE SHALL BE HIGH DENSITY POLYSTYRENE, 30mm THICK, PIPING INSULATION ON PIPING BELOW Ø200mm SHALL BE HIGH DENSITY POLYSTYRENE, 25mm THICK.
  - MYLAR SHEATH VAPOUR BARRIER TO BE EMPLOYED.
  - ALL CHILLED PIPING IN ACCESS FLOOR VOID AND CEILING VOID TO BE INSULATED AND CLAD IN GALVANISED SHEET 0.6mm t
  - ALL EXPOSED CHILLED WATER PIPE AND CONDENSATE DRAINS IN CORRIDORS AND PASSAGES TO BE IN A BRUSHED STAINLESS STEEL CONDUIT
  - ALL PIPING AND TO BE INSULATED AND CLAD IN SHINY STAINLESS STEEL 0.6mm t
  - PIPING SUPPORTS SHALL BE PROVIDED AT ALL CHANGES IN PIPING DIRECTION AND AT A MAXIMUM SPACING AS INDICATED IN THE PIPING SUPPORT TABLE BELOW.
  - "ROUGH-IN" (TACK AND LOOSELY SUPPORT) ALL PIPING AND FITTINGS FOR THE APPROVAL OF THE ENGINEER PRIOR TO FULL WELDING AND FIRM FIXING.
  - ALL DISCREPANCIES BETWEEN THIS DRAWING AND ACTUAL SITE CONDITIONS SHALL BE BROUGHT TO THE ATTENTION OF THE RESPONSIBLE ENGINEER.
  - FIRE STOPPING SHALL BE PROVIDED AT ALL FIRE BARRIERS AND FIRE WALLS BY THE RESPONSIBLE FIRE PROOFING CONTRACTOR.
  - THE APPROVAL OF THE STRUCTURAL ENGINEER SHALL BE SOUGHT FOR ALL PIPING SUPPORT METHODS WHERE STRUCTURAL FIXING IS EMPLOYED.

